



US008144047B2

(12) **United States Patent**
Lin et al.

(10) **Patent No.:** **US 8,144,047 B2**
(45) **Date of Patent:** **Mar. 27, 2012**

(54) **CURRENT-MODE DUAL-SLOPE TEMPERATURE-DIGITAL CONVERSION DEVICE**

7,372,392 B1 * 5/2008 Wan et al. 341/172
7,413,342 B2 * 8/2008 Mukherjee 374/170
2007/0126619 A1 6/2007 McGrath
2008/0095213 A1 4/2008 Lin et al.

(75) Inventors: **Ming-Tse Lin**, Kaohsiung County (TW);
Chung-Chih Hung, Tainan County (TW)

OTHER PUBLICATIONS

Chen et al., "A Time-to-Digital-Converter-Based CMOS Smart Temperature Sensor," IEEE Journal of Solid-State Circuits, Aug. 2005, pp. 1642-1648, vol. 40, No. 8.

(73) Assignee: **National Chiao Tung University**, Hsinchu (TW)

Lin et al., An Ultra Low Power 1V, 220nW Temperature Sensor for Passive Wireless Applications, IEEE Custom Integrated Circuits Conference (CICC), Aug. 2008, pp. 507-510.

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 29 days.

Woo et al., "Dual-DLL-Based CMOS All-Digital Temperature Sensor for Microprocessor Thermal Monitoring," IEEE International Solid-State Circuits Conference, Feb. 2009, pp. 68-69, vol. 3.

(21) Appl. No.: **12/910,303**

* cited by examiner

(22) Filed: **Oct. 22, 2010**

Primary Examiner — Khai M Nguyen

(65) **Prior Publication Data**

US 2011/0291871 A1 Dec. 1, 2011

(74) Attorney, Agent, or Firm — Muncy, Geissler, Olds & Lowe, PLLC

(30) **Foreign Application Priority Data**

May 25, 2010 (TW) 99116654 A

(57) **ABSTRACT**

(51) **Int. Cl.**
H03M 1/82 (2006.01)

A current mode dual-slope temperature-to-digital conversion device is disclosed. The conversion device comprises a temperature dependent current source and a reference current source. Firstly, a capacitor is charged by the temperature dependent current source. Next, the capacitor is discharged by the reference current source. The capacitor is coupled to at least one trigger, and the trigger sends out a first digital signal to a logic controller by the voltage of the capacitor. Then, the logic controller sends out a second digital signal to a time-to-digital converter according to the first digital signal. When the capacitor is discharged by the reference current source and before the first digital signal is varied, the converter receives the second digital signal and a clock signal to generate a corresponding digital output value. The present invention achieves the requirement of the high linearity resolution with the dual-slope architecture lest the curvature effect resulted from the time-domain circuit be occurred.

(52) **U.S. Cl.** **341/167; 341/155; 341/166**

(58) **Field of Classification Search** **341/155, 341/166-167**


See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,982,221 A 11/1999 Tuthill
6,019,508 A 2/2000 Lien
6,111,533 A 8/2000 Yuan et al.
6,377,110 B1 4/2002 Cooper
6,962,436 B1 * 11/2005 Holloway et al. 374/170
7,173,501 B1 2/2007 Varricchio

10 Claims, 3 Drawing Sheets

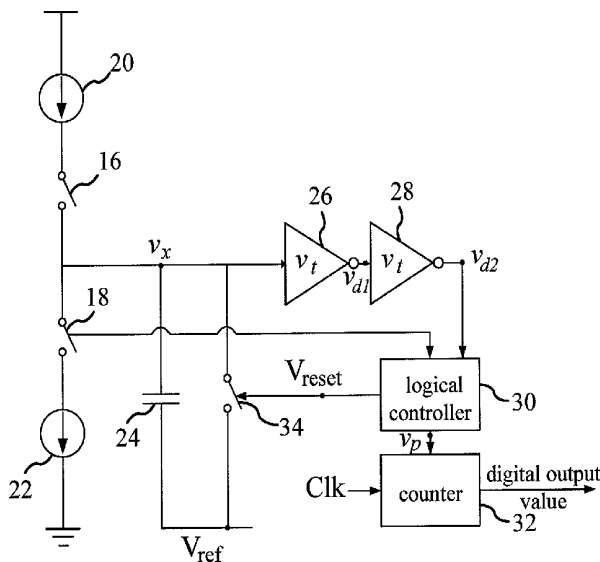

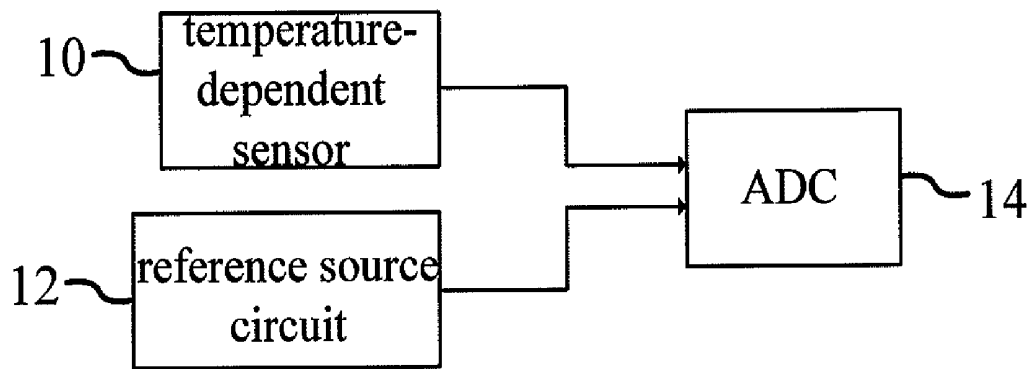


Fig.1
(prior art)

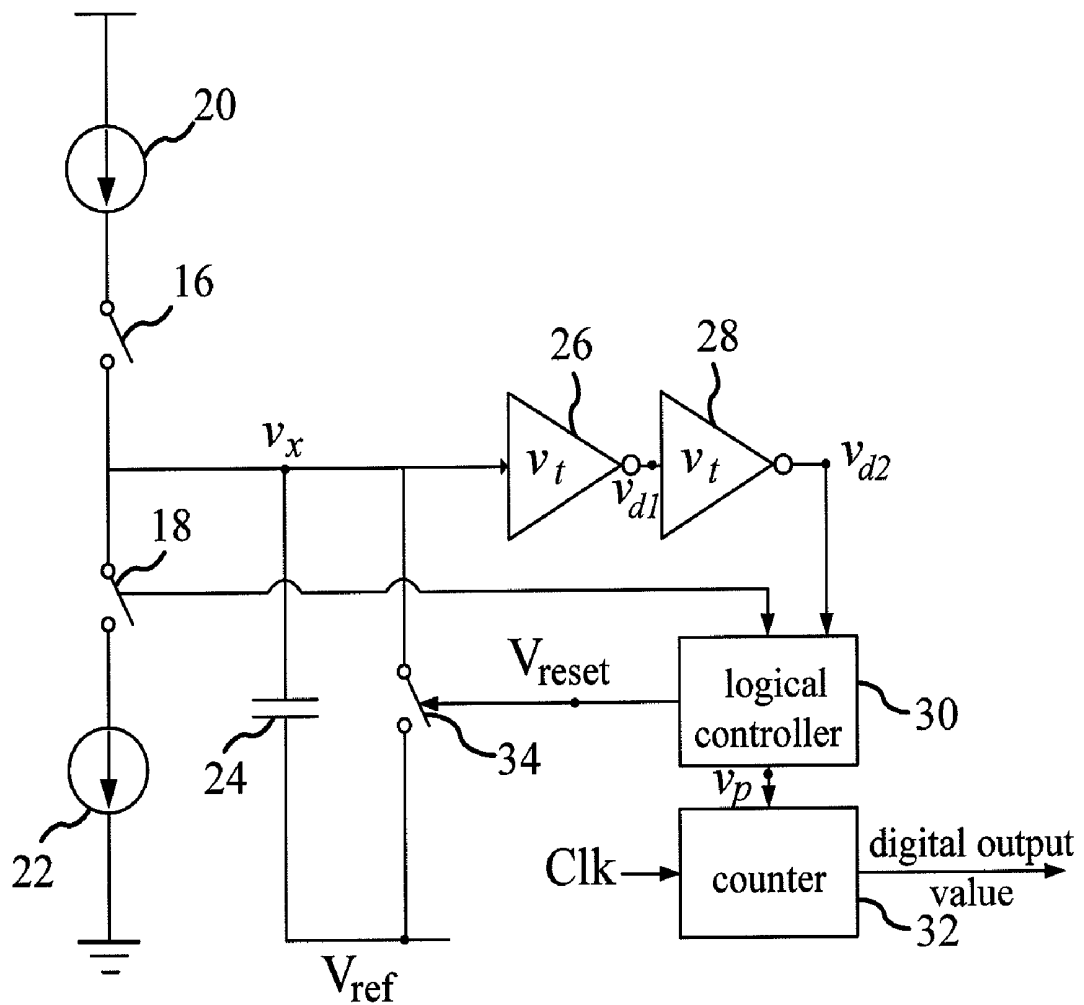


Fig.2

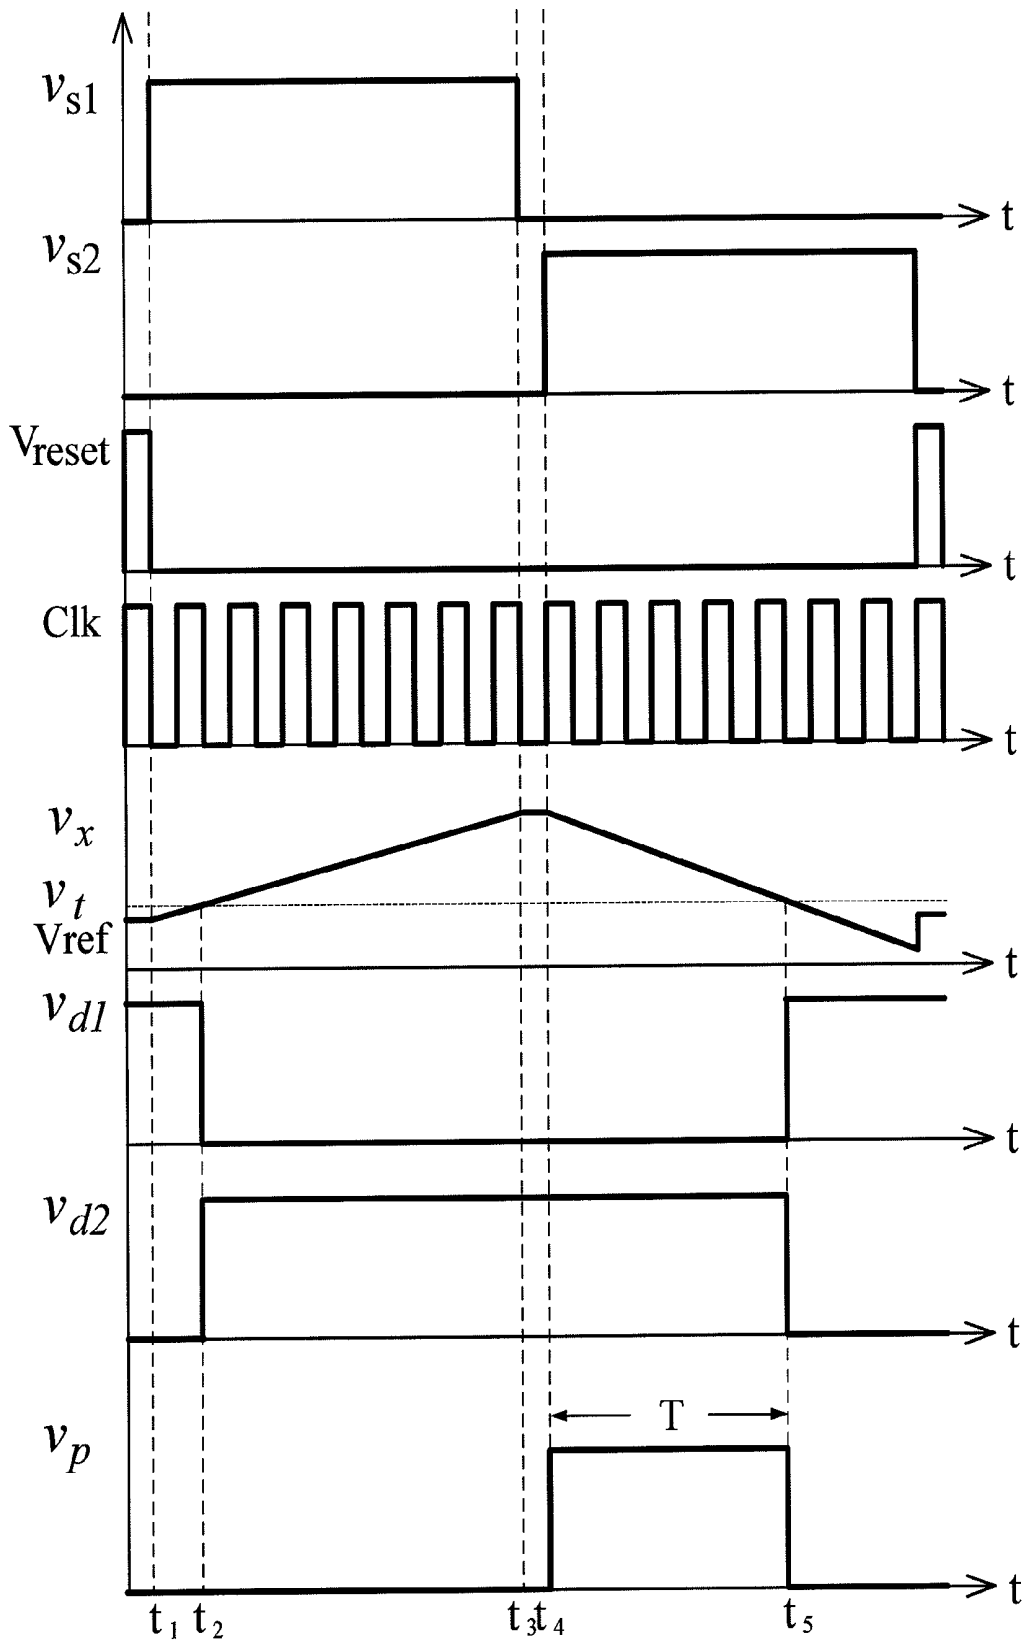


Fig.3

CURRENT-MODE DUAL-SLOPE TEMPERATURE-DIGITAL CONVERSION DEVICE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a conversion device, particularly to a current-mode dual-slope temperature-digital conversion device.

2. Description of the Related Art

The daily-life appliances usually need temperature data, such as air conditioners, refrigerators, and fire warning systems. Temperature is measured via detecting the variation of a physical property, such as resistance variation, color variation, volume variation or electromotive force generated by magnetic flux change. The electric conductivity of a semiconductor material is greatly influenced by temperature. Therefore, the electric conductivity of an integrated circuit made of semiconductor materials correlates with temperature. The temperature characteristic curve of an integrated circuit is thus used to fabricate a temperature-sensing integrated circuit.

Refer to FIG. 1. A general temperature sensor comprises a temperature-dependent sensor **10**, a reference source circuit **12** and an analog-to-digital converter (ADC) **14**. The temperature-dependent sensor **10** generates temperature-dependent voltage or temperature-dependent current. The reference source circuit **12** generates temperature-independent reference voltage or temperature-independent reference current. The analog-to-digital converter **14** converts the voltage difference or current difference between the temperature-dependent sensor **10** and the reference source circuit **12** into digital signals.

The temperature sensors may be categorized into two systems: the voltage-domain system and the time-domain system. For the voltage-domain system, a complicated calibration circuit is needed to achieve high precision and high accuracy at a given operation voltage. The complicated calibration circuit should increase the time and cost of development, consume more power, and impair portability of products. The time-domain system is neither limited by voltage swing nor dependent on an additional calibration circuit. However, the time-domain system has some problems in the curvature of the conversion curve because the time-domain system adopts an inverter or a delay element as the temperature-dependent sensor.

Accordingly, the present invention proposes a current-mode dual-slope temperature-digital conversion device to overcome the abovementioned problems.

SUMMARY OF THE INVENTION

The primary objective of the present invention proposes a current-mode dual-slope temperature-digital conversion device, which uses a dual-slope approach to implement temperature-digital conversion, whereby is avoided the curvature effect occurring in the conventional time-domain system, and whereby is achieved high precision of a high linear relationship.

Another objective of the present invention proposes a current-mode dual-slope temperature-digital conversion device, wherein a current-type integrator, which is formed of current sources and capacitors, replaces the conventional amplification-type integrator, and wherein the inverter, which is small-size, power-saving and less sensitive to temperature, replaces

the conventional comparator, whereby is achieved compactness and high power efficiency.

To achieve the abovementioned objectives, the present invention proposes a current-mode dual-slope temperature-digital conversion device, which comprises a first switch and a second switch, which are cascaded to each other and controlled by a group of non-overlapped control signals. A temperature-dependent current source and a reference current source are respectively connected with the first and second switches. The temperature-dependent current source and the reference current source respectively generate a temperature-dependent current and a reference current. One terminal of a capacitor is connected with the first switch and the second switch; another terminal of the capacitor is connected with a reference voltage. When the first switch is turned on, the temperature-dependent current charges the capacitor. When the second switch is turned on, the reference current discharges the capacitor. The first switch, the second switch and the capacitor are connected with the input terminal of at least one trigger. The trigger is connected with a trigger voltage. The trigger compares the trigger voltage and the terminal voltage of the capacitor and outputs a first digital signal. The trigger may be realized with an inverter. A logical controller is connected with the output terminal of the trigger and the second switch. The logical controller receives the first digital signal and outputs a second digital signal according to the switching state of the second switch and the first digital signal. The logical controller is further connected with a time-digital converter. When the reference current discharges the capacitor, and before the first digital signal varies, the time-digital converter receives the second digital signal and a clock signal and uses the clock signal to work out the number of the corresponding clock cycles according to the second digital signal and then generates an output digital value.

Below, the embodiments are described in detail in cooperation with the drawings to make easily understood technical contents, characteristics and accomplishments of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram schematically showing the circuit of a conventional temperature sensing device;

FIG. 2 is a block diagram schematically showing the circuit of a current-mode dual-slope temperature-digital conversion device according to the present invention; and

FIG. 3 is a diagram showing the waveforms of various signals used in the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Refer to FIG. 2. The current-mode dual-slope temperature-digital conversion device of the present invention comprises a first switch **16** and a second switch **18**, which are controlled by a group of non-overlapped control signals. When the first switch **16** is turned on, the second switch **18** is turned off. When the first switch **16** is turned off, the second switch **18** is turned on. Alternatively, the first and second switches **16** and **18** can be turned off simultaneously, but they cannot be turned on at the same time. The first switch **16** and the second switch **18** are respectively connected with a reference current source **20** and a temperature-dependent current source **22**. Both the reference current source **20** and the temperature-dependent current source **22** are direct current sources. The reference current source **20** generates a reference current. The temperature-dependent current source **22** generates a temperature-dependent current proportional to the temperature. The

higher the temperature, the greater the temperature-dependent current. The lower the temperature, the smaller the temperature-dependent current.

The present invention further comprises at least one trigger. The at least one trigger is exemplified by two cascade inverters **26** and **28** in FIG. 2. Both the first and second switches **16** and **18** are coupled to one terminal of a capacitor **24** and the input terminal of the inverter **26**. Another terminal of the capacitor **24** is coupled to a reference voltage. When the first switch **16** is turned on, the temperature-dependent current charges the capacitor **24**. When the second switch **18** is turned on, the reference current discharges the capacitor **24**.

A switching voltage V_t is coupled to each of the two inverters **26** and **28** to function as a trigger voltage. The switching voltage V_t is greater than the reference voltage V_{ref} . The output terminal of the inverter **26** is coupled to a logical controller **30**. The inverter **26** compares the terminal voltage of the capacitor **24** and the switching voltage V_t and outputs a first digital signal. The inverter **28** receives the first digital signal, compares the first digital signal with the switching voltage V_t , and outputs a second digital signal to the logic controller **30**.

The conversion device of the present invention adopts a current-type integrator formed of the current sources **20** and **22** and the capacitor **24**. The current-type integrator not only can replace the conventional amplification-type integrator but also applies to the CMOS (Complementary Metal Oxide Semiconductor) design. As the current-type integrator uses the inverters that are small-size, power-saving and less sensitive to temperature, to replace the conventional power-consuming comparators. Therefore, the conversion device has advantages of compactness and high power efficiency.

The logical controller **30** is coupled to the second switch **18** and a time-to-digital converter, which is exemplified by a counter **32** in FIG. 2. The logical controller **30** receives the second digital signal and outputs a third digital signal according to the second digital signal and the switching state of the second switch **18**. When the reference current discharges the capacitor **24**, and before the second digital signal varies, the counter **32** receives the third digital signal and a clock signal Clk. The counter **32** works out the number of the clock cycles from the clock signal Clk according to the DC level of the third digital signal and then generates the corresponding count as the output digital value.

The capacitor **24** is connected with a reset switch **34** in parallel. The reset switch **34** is coupled to the reference voltage V_{ref} and the logical controller **30**. Before the temperature-dependent current charges the capacitor **24**, and after the counter **32** outputs the count, the logical controller **30** instantaneously turns on the reset switch **34** to make the terminal voltage of the capacitor **24** lower than the reference voltage V_{ref} .

Refer to FIG. 3. The meanings of the waveforms in FIG. 3 will be explained firstly. As mentioned above, the first and second switches **16** and **18** are controlled by a group of non-overlapped signals. V_{s1} denotes the voltage of the signal controlling the first switch **16**. When the voltage V_{s1} is at a high level, the first switch is turned on. When the voltage V_{s1} is at a lower level, the first switch **16** is turned off. V_{s2} denotes the voltage of the signal controlling the second switch **18**. When the voltage V_{s2} is at a high level, the second switch **18** is turned on. When the voltage V_{s2} is at a low level, the second switch **18** is turned off. V_{reset} is the voltage between the logical controller **30** and the reset switch **34**. While the voltage V_{reset} is at a high level, the logical controller **30** turns on the reset switch **34**. While the voltage V_{reset} is at a low level, the logical controller **30** turns off the reset switch. V_x denotes

the terminal voltage of the capacitor **24**. V_t denotes the switching voltage of the inverter **26** or the inverter **28**. V_{d1} denotes the voltage of the first digital signal. V_{d2} denotes the voltage of the second digital signal. V_p denotes the voltage of the third digital signal.

Before the time point t_1 , both V_{s1} and V_{s2} are at a low level, and V_{reset} is at a high level. Therefore, the first switch **16** and the second switch **18** are turned off. The logical controller **30** turns on the reset switch **34** instantaneously. The terminal voltage V_x of the capacitor **24** is equal to V_{ref} . The inverter **26** compares V_x with V_t . As V_x is smaller than V_t , the inverter **26** outputs a first digital signal having a voltage V_{d1} at a high level. The inverter **28** receives the first digital signal and outputs a second digital signal having a voltage V_{d2} at a low level. As the second switch **18** is turned off, the logical controller **30** outputs a third digital signal having a voltage V_p at a low level.

At the time point t_1 , V_{s1} rises from a low level to a high level, and V_{s2} is at a low level. Therefore, the first switch **16**, which is originally turned off, is turned on, and the second switch **18** is still turned off. Meanwhile, V_x , V_{d1} , V_{d2} and V_p are maintained at the original values.

Between the time point t_2 and the time point t_3 , V_{s1} is at a high level, and V_{s2} is at a low level. Therefore, the first switch **16** is turned on, and the second switch **18** is turned off. Meanwhile, the temperature-dependent current is still charging the capacitor **24**, and V_x is greater than V_t . The inverter **26** compares V_x with V_t and outputs a first digital signal having a low-level voltage V_{d1} . The inverter **28** receives the first digital signal and outputs a second digital value having a high-level voltage V_{d2} . As the second switch **18** is turned off, the logical controller **30** outputs a third digital signal having a low-level voltage V_p .

At the time point t_3 , V_{s1} drops from a high level to a low level. Therefore, the first switch **16**, which is originally turned on, is turned off, and the second switch **18** is still turned off. Meanwhile, the temperature-dependent current stops charging the capacitor **24**, and V_x no more increases but is maintained at a given value. At the same time, V_x is greater than V_t . The inverter **26** compares V_x with V_t and outputs a first digital signal having a low-level voltage V_{d1} . The inverter **28** receives the first digital signal and outputs a second digital signal having a high-level voltage V_{d2} . As the second switch **18** is turned off, the logical controller **30** outputs a third digital signal having a low-level voltage V_p .

Between the time point t_3 and the time point t_4 , V_{s1} is at a low level, and V_{s2} is also at a low level. Therefore, the first switch **16** is turned off, and the second switch **18** is also turned off. At this time, V_x is greater than V_t . The inverter **26** compares V_x with V_t and outputs a first digital signal having a low-level voltage V_{d1} . The inverter **28** receives the first digital signal and outputs a second digital signal having a high-level voltage V_{d2} . As the second switch **18** is turned off, the logical controller **30** outputs a third digital signal having a low-level voltage V_p .

At the time point t_4 , V_{s1} is at a low level, but V_{s2} rises from a low level to a high level. Therefore, the first switch **16** is still turned off, but the second switch **18**, which is originally turned off, is turned on. At this time, V_x , V_{d1} and V_{d2} are maintained at their original values. As the second switch **18**, which is originally turned off, is turned on, the voltage V_p of the third signal output by the logical controller **30** rises from a low-level to a high level.

Between the time point t_4 and the time point t_5 , V_{s1} is at a low level, and V_{s2} is at a high level. Therefore, the first switch **16** is turned off, and the second switch **18** is turned on. The reference current, which is generated by the reference current

source **22**, discharges the capacitor **24**. Thus, V_x decreases at a given slope. However, V_x is still greater than V_t at this time interval. The inverter **26** compares V_x with V_t and outputs a first digital signal having a low-level voltage V_{d1} . The inverter **28** receives the first digital signal and outputs a second digital signal having a high-level voltage V_{d2} . As the state of the second switch **18** and the value of the voltage V_{d2} are maintained unchanged, the logical controller **30** outputs a third digital signal having a high-level voltage V_p .

At the time point t_5 , V_{s1} is at a low level, and V_{s2} is at a high level. Therefore, the first switch **16** is turned off, and the second switch **18** is turned on. The reference current discharges the capacitor **24**. At this time, V_x equals V_r . Thus, the inverters **26** and **28** are triggered. The voltage V_{d1} of the first digital signal output by the inverter **26** rises from a low level to a high level. The voltage V_{d2} of the second digital signal output by the inverter **28** drops from a high level to a low level. Therefore, the voltage V_p of the third signal output by the logical controller **30** drops from a high level to a low level.

In the time interval between t_4 and t_5 , the counter **32** receives the high-level third digital signal and the clock signal, works out the number of the corresponding clock cycles according to the high level of the third digital signal and then generates the corresponding count as the output digital value.

The higher the temperature, the greater the temperature-dependent current, and the steeper the charging slope between t_1 and t_3 . The steeper the charging slope, the greater the value of V_x at the time point t_3 . In such a case, the time interval T where V_p is at a high level also elongates with V_x for a given reference current. Thus, the count output by the counter **32** also increases because the number of the clock cycles is proportional to the time interval T . The present invention realizes the temperature-digital conversion, using the dual-slope characteristic of the charging current and the discharging current. Thus, the present invention not only is exempted from the curvature effect generated by the delay element in the conventional time-domain system but also has high precision of a linear relationship.

After the time point t_5 , and before the first switch **16** is turned on once again, the logical controller **30** has to control the reset switch **34** to turn on instantaneously to restore V_x to the level of V_{ref} —the initial voltage of charging the capacitor **24**.

In the embodiments described above, the trigger is realized with the inverters **26** and **28**. The trigger may be alternatively realized with a comparator. In such a case, the positive input terminal of the comparator is coupled to the capacitor **24**, and the negative input terminal is coupled to the switching voltage V_s functioning as a trigger voltage. The output terminal of the comparator is coupled to the logical controller **30**. The comparator compares the terminal voltage of the capacitor **24** with the switching voltage and outputs the abovementioned second digital signal having a voltage of V_{d2} .

In conclusion, the present invention not only achieves high precision of a linear relationship but also has advantages of compactness and high power efficiency.

The embodiments described above are only to exemplify the present invention but not to limit the scope of the present invention. Any equivalent modification or variation according to the technical contents, characteristics or spirit of the present invention is to be also included within the scope of the present invention.

What is claimed is:

1. A current-mode dual-slope temperature-digital conversion device comprising a first switch;

a second switch connected with said first switch, wherein said first switch and said second switch are controlled by a group of non-overlapped control signals;

a temperature-dependent current source connected with said first switch and generating a temperature-dependent current;

a reference current source connected with said second switch and generating a reference current;

a capacitor with one terminal connected with said first switch and said second switch and with another terminal connected with a reference voltage, wherein when said first switch is turned on, said temperature-dependent current charges said capacitor, and wherein when said second switch is turned on, said reference current discharges said capacitor;

at least one trigger with an input terminal connected with said first switch, said second switch and said capacitor, setting a trigger voltage, comparing a terminal voltage of said capacitor with said trigger voltage and outputting a first digital signal;

a logical controller connected with an output terminal of said trigger and said second switch, receiving said first digital signal, outputting a second digital signal according to a switching state of said second switch and said first digital signal; and

a time-to-digital converter receiving said second digital and a clock signal, working out a count of clock cycles corresponding to said clock signal according to said second digital signal, and generating a digital output value corresponding to said count when said reference current discharges said capacitor and before said first digital signal varies.

2. The current-mode dual-slope temperature-digital conversion device according to claim 1, wherein said trigger is realized with a single comparator, and wherein a positive input terminal of said comparator is connected with said capacitor, and wherein a negative input terminal of said comparator is connected with a switching voltage functioning as said trigger voltage, and wherein an output terminal of said comparator is connected with said logical controller, and wherein said comparator compares said terminal voltage of said capacitor with said switching voltage and outputs said first digital signal.

3. The current-mode dual-slope temperature-digital conversion device according to claim 1, wherein said trigger is realized with two cascaded inverters, and wherein each said inverter sets a switching voltage functioning as said trigger voltage, and wherein one said inverter has an input terminal connected with said capacitor, compares a terminal voltage of said capacitor and said switching voltage and outputs a third digital signal, and wherein the other said inverter has an output terminal connected with said logical controller, receives said third digital signal, compares said third digital signal with said switching voltage and outputs said first digital signal to said logical controller.

4. The current-mode dual-slope temperature-digital conversion device according to claim 1, wherein when said second switch is turned off, said second digital signal is at a low level.

5. The current-mode dual-slope temperature-digital conversion device according to claim 1, wherein when said second switch, which is originally turned off, is turned on, said second digital signal rises from a low level to a high level.

6. The current-mode dual-slope temperature-digital conversion device according to claim 5, wherein when said second switch is turned on, and when said first digital signal

7

drops from a high level to a low level, said second digital signal also drops from a high level to a low level.

7. The current-mode dual-slope temperature-digital conversion device according to claim 1, wherein according to a high level of said second digital signal, said time-to-digital converter uses said clock signal to work out said count of said clock cycles corresponding to said clock signal and generates said digital output value corresponding to said count.

8. The current-mode dual-slope temperature-digital conversion device according to claim 1 further comprising a reset switch connected with said capacitor in parallel and coupled to said reference voltage and said logical controller, wherein said logical controller turns on said reset switch instantaneously to control said terminal voltage of said capacitor to be at said reference voltage before said temperature-dependent

8

current charges said capacitor and after said time-to-digital converter outputs said digital output value.

9. The current-mode dual-slope temperature-digital conversion device according to claim 1, wherein said time-to-digital converter is a counter, and wherein according to a direct-current level of said second digital signal, said counter uses said clock signal to work out said count of said clock cycles corresponding to said clock signal to function as an attribute value and uses said attribute value as said digital output value.

10. The current-mode dual-slope temperature-digital conversion device according to claim 1, wherein both said temperature-dependent current source and said reference current source are direct-current sources.

* * * * *