



(19) **United States**

(12) **Patent Application Publication**
Chow et al.

(10) **Pub. No.: US 2010/0183258 A1**

(43) **Pub. Date: Jul. 22, 2010**

(54) **FIBER SENSING SYSTEM WITH SELF-DETECTION MECHANISM**

Publication Classification

(76) Inventors: **Chi-Wai Chow**, Hsinchu City (TW); **Sien Chi**, Hsinchu City (TW); **Chia-Hsuan Wang**, Jhuangwei Township (TW); **Fu-Yuan Shih**, Anding Township (TW); **Chen-Hung Yeh**, Banciao City (TW)

(51) **Int. Cl.**
G02B 6/00 (2006.01)
G02B 6/26 (2006.01)
(52) **U.S. Cl.** **385/12; 385/16**

(57) **ABSTRACT**

The present invention discloses a fiber sensing system with self-detection mechanism which utilizes a central office to control secondary ring architecture formed by fiber sensor, remote node and optical coupler primarily. The secondary ring architecture is connected serially to form a primary ring architecture. The central office has a tunable laser light source that can deliver the light source to the fiber sensor. Since the fiber sensor has reflective ability, all light source signal sent by the tunable laser light source will be detected and measured by the fiber sensor. Thus central office can detect all signals reflected by the fiber sensor and produce a spectrum for analyzing fault point locations. The present invention can greatly enhance survivability and sensing capacity of all fiber sensors, so that when a fault point caused by environmental change within the fiber, it will not effect the overall operation of the sensing mechanism. The application of fiber sensor can also reduce cost and complexity of the overall fiber network topology.


Correspondence Address:
ROSENBERG, KLEIN & LEE
3458 ELLICOTT CENTER DRIVE-SUITE 101
ELLICOTT CITY, MD 21043 (US)

(21) Appl. No.: **12/385,229**

(22) Filed: **Apr. 2, 2009**

(30) **Foreign Application Priority Data**

Jan. 20, 2009 (TW) 98102033

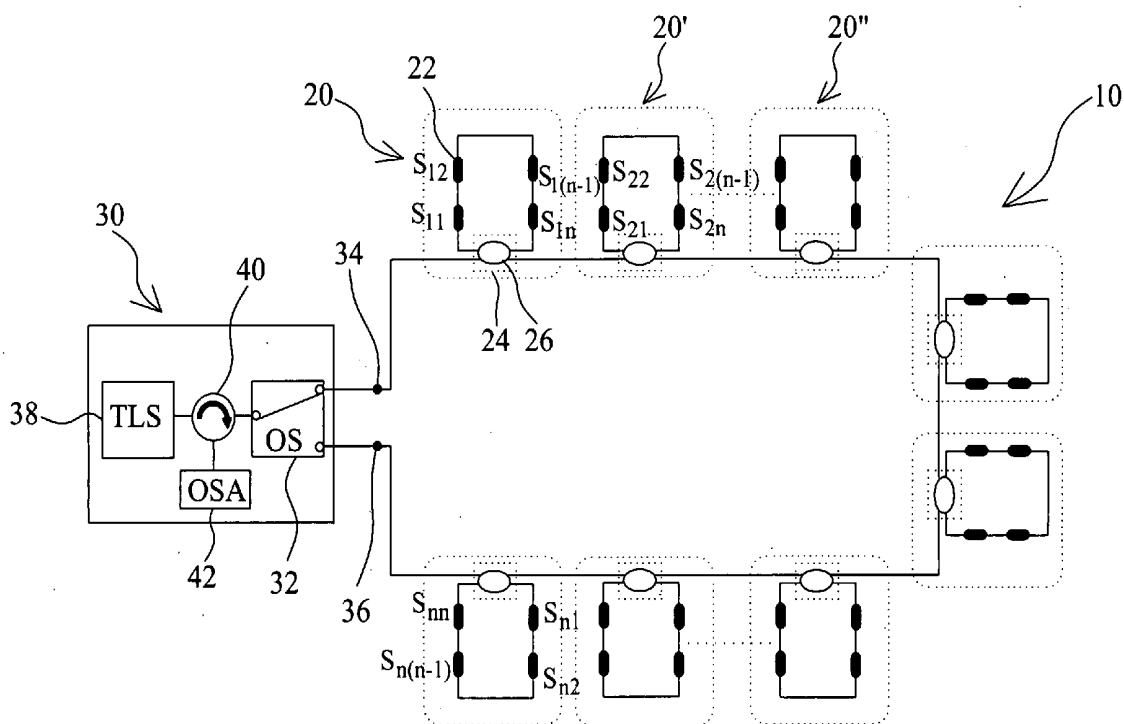

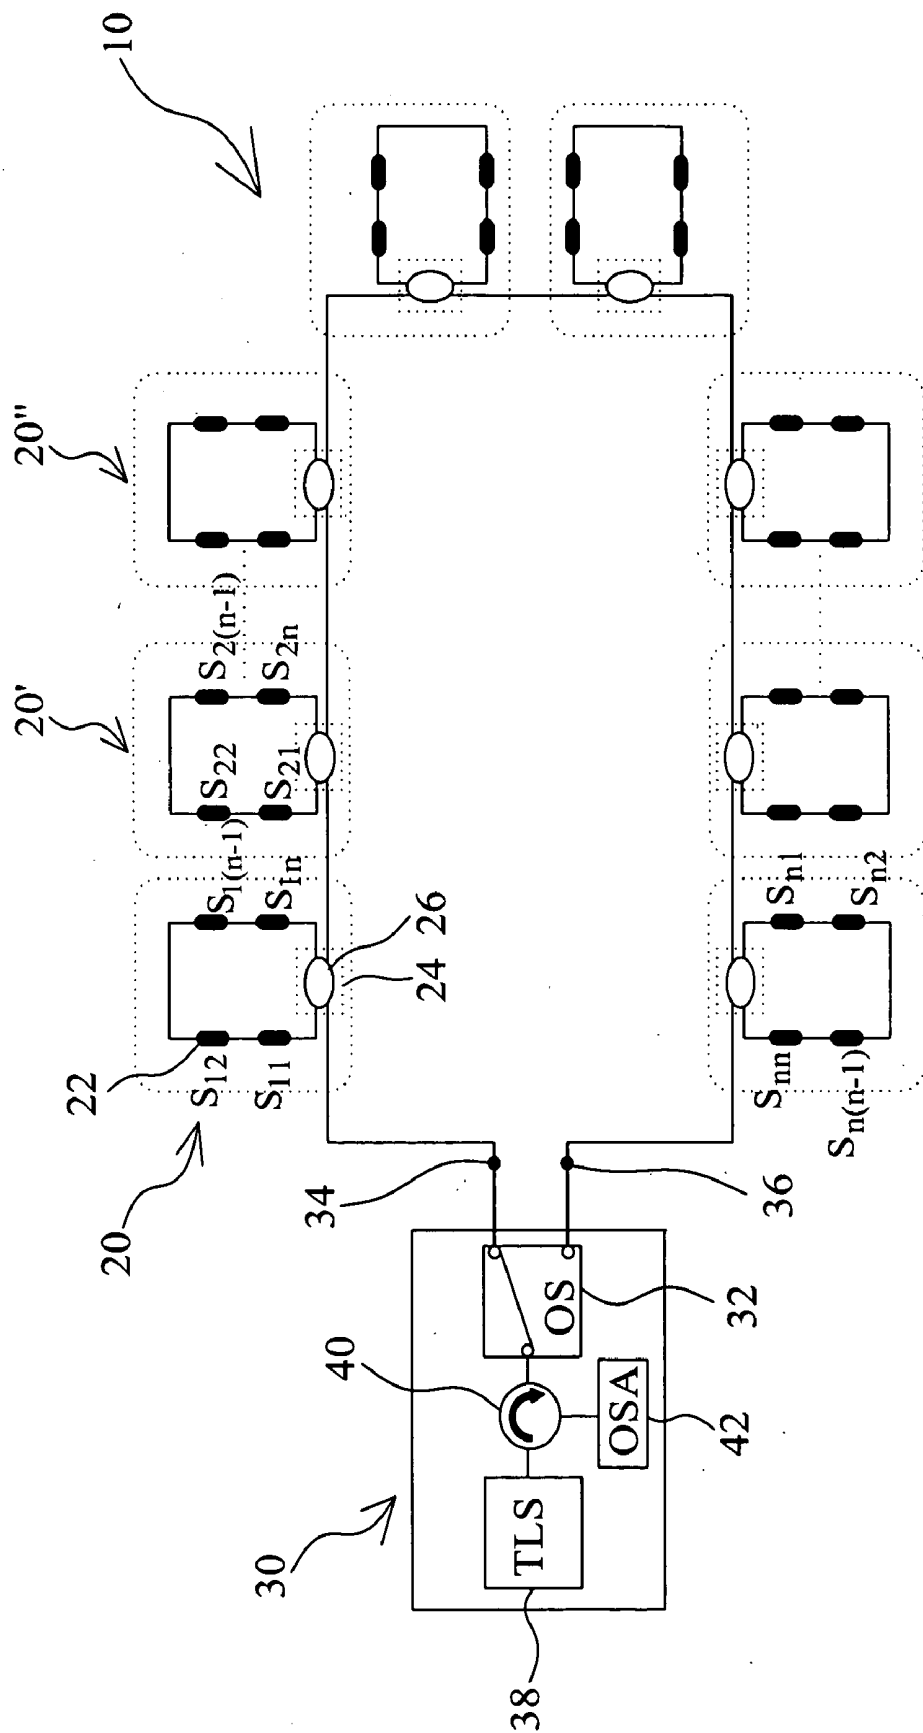


Fig. 1

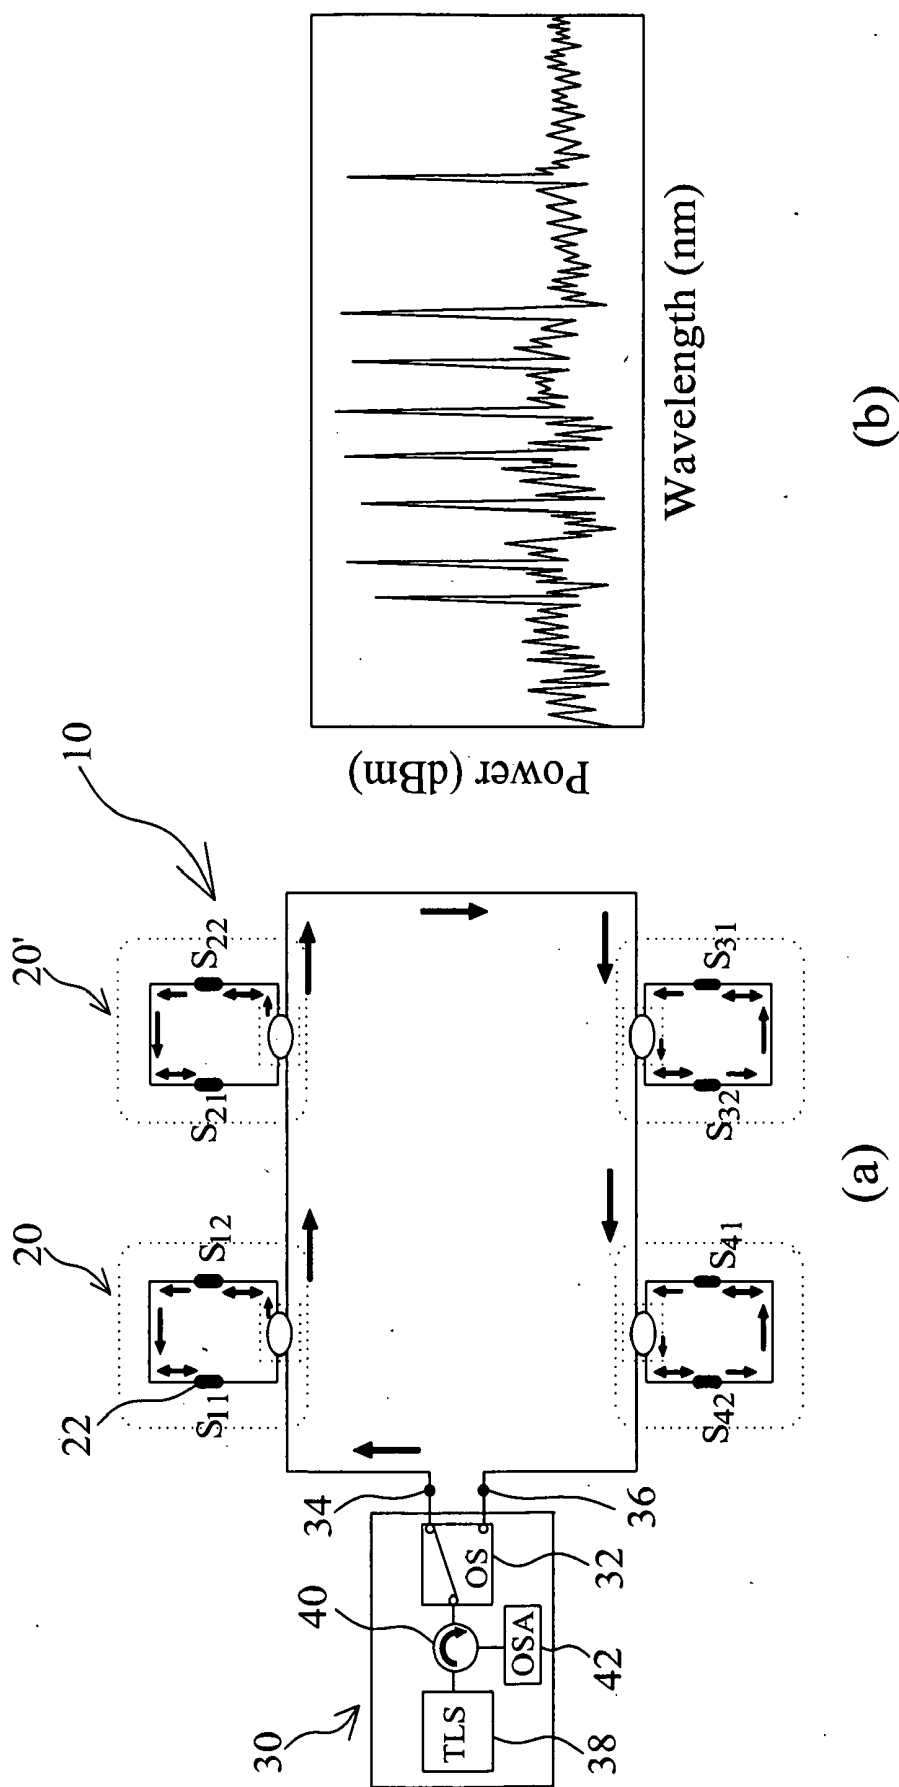


Fig. 2

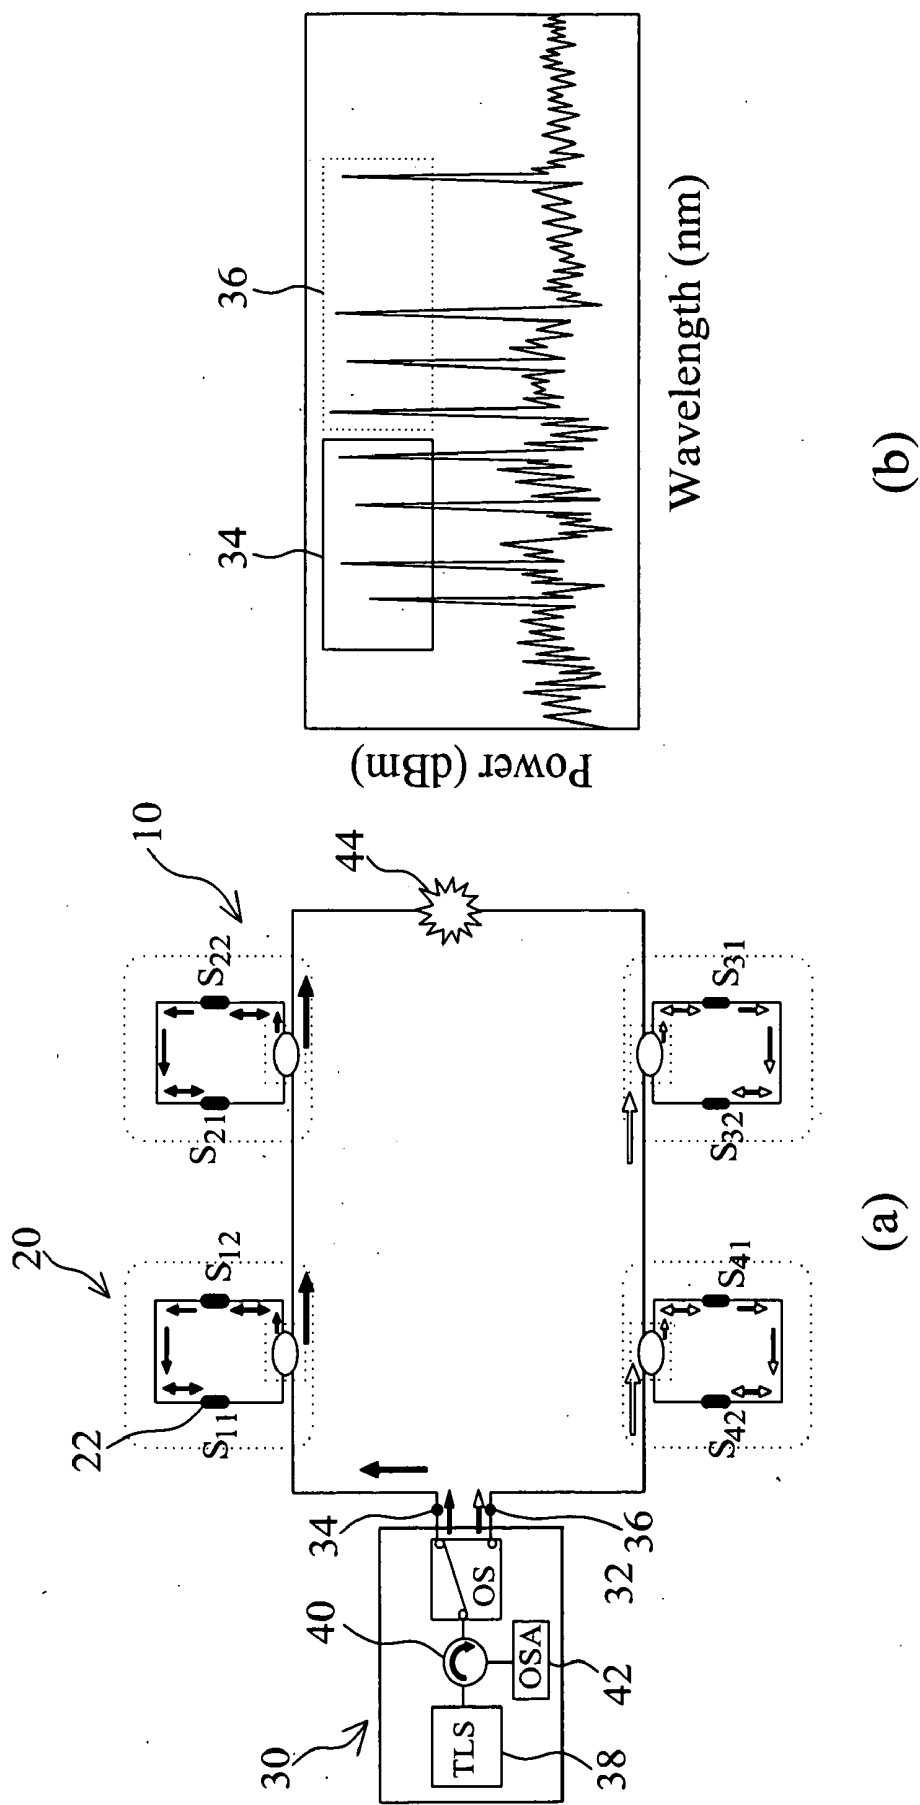


Fig. 3

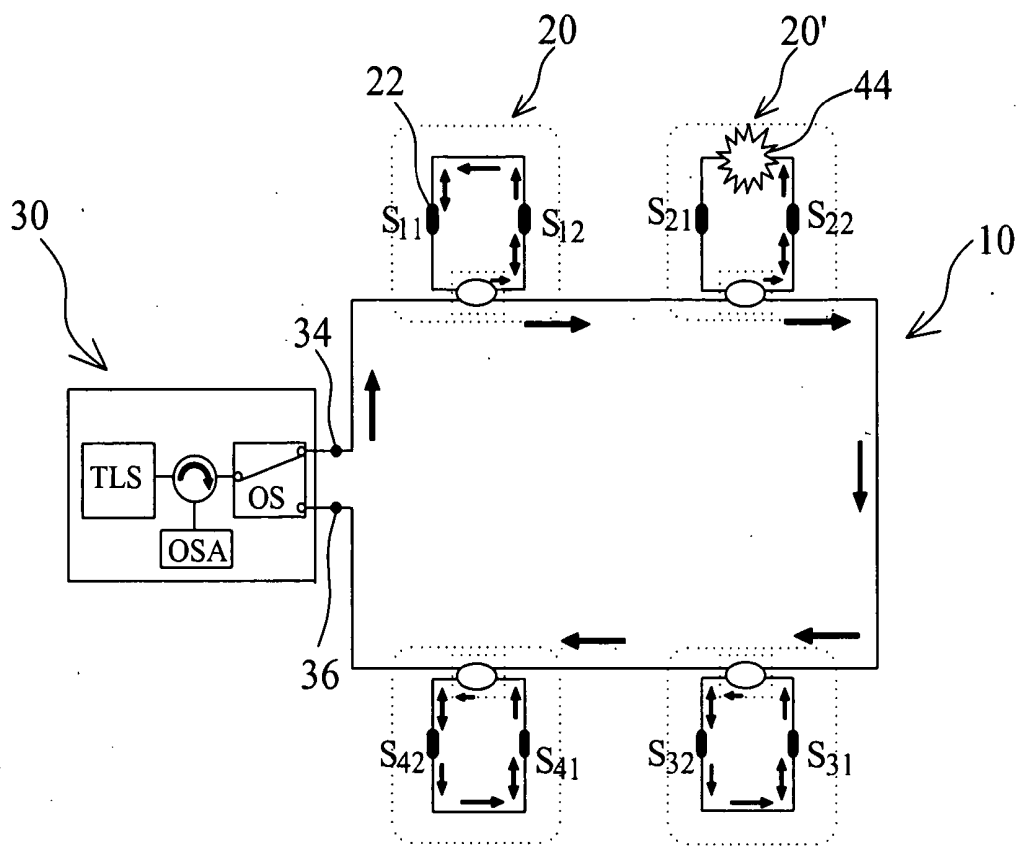


Fig. 4(a)

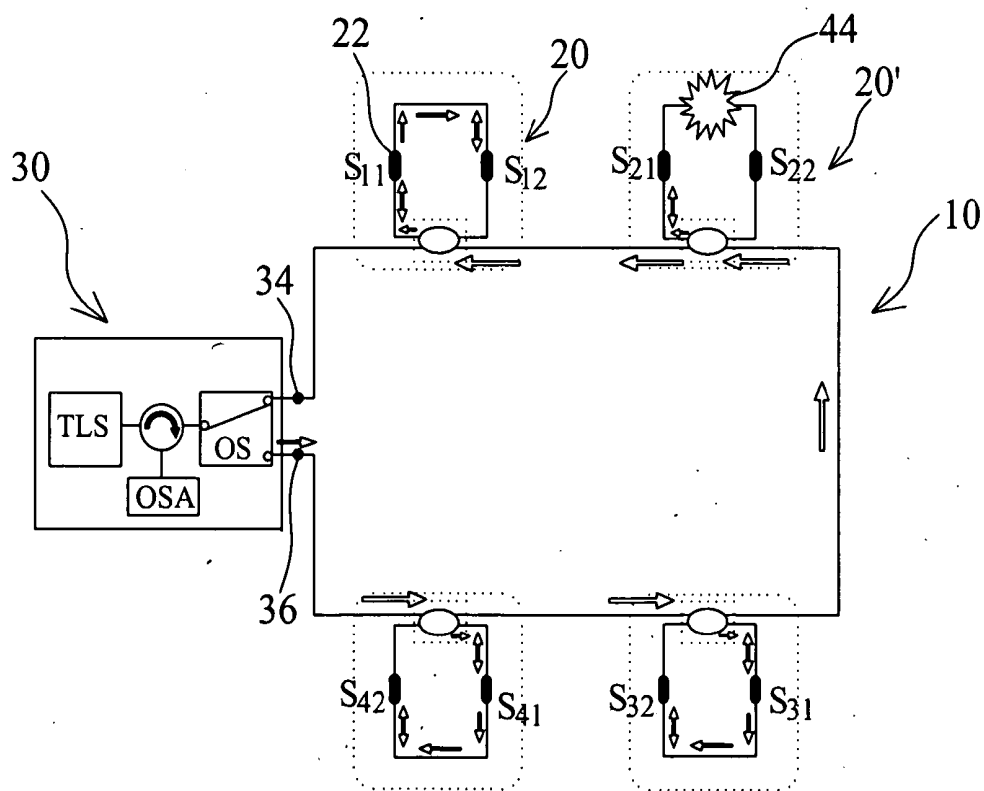


Fig. 4(b)

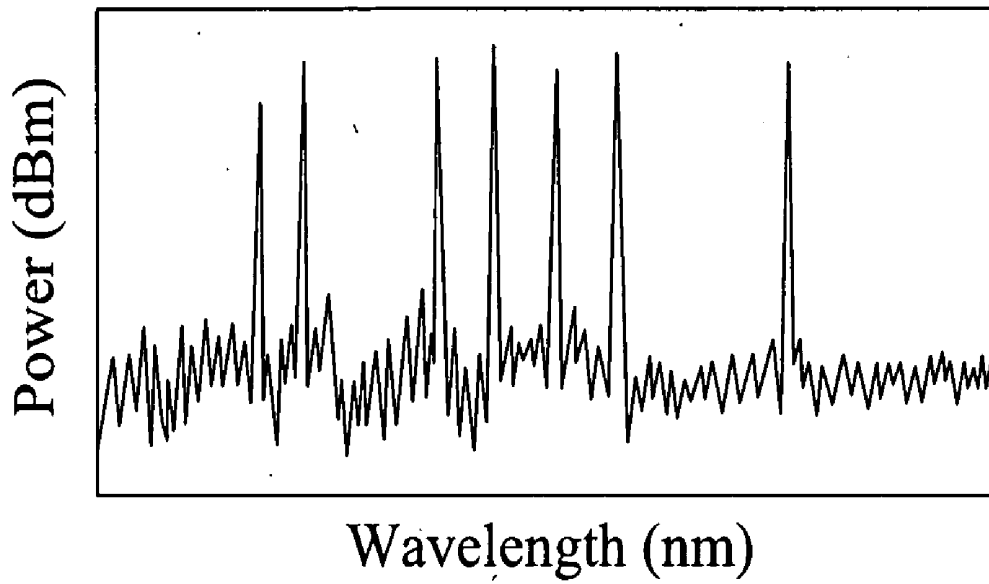


Fig. 4(c)

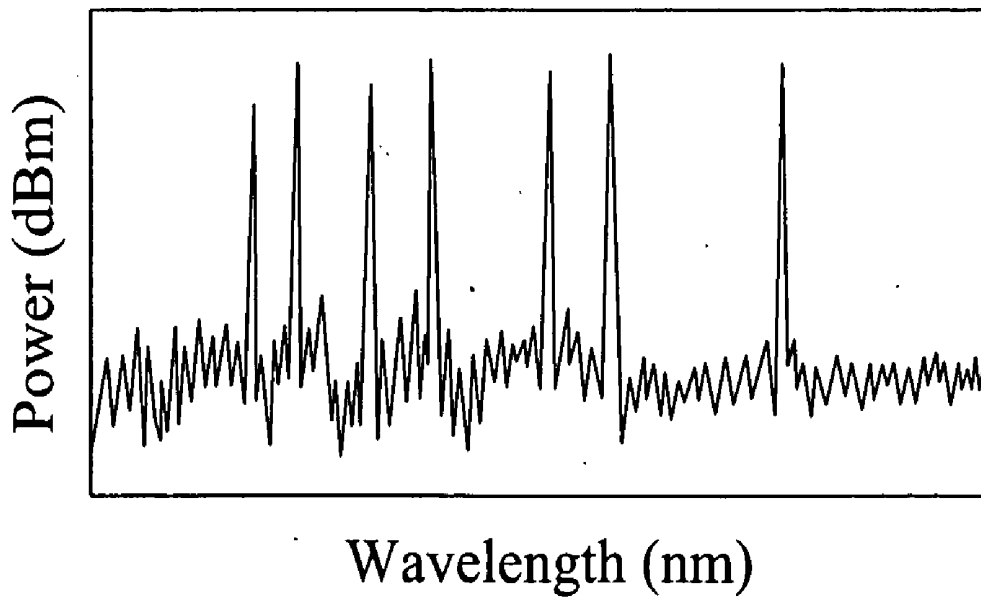


Fig. 4(d)

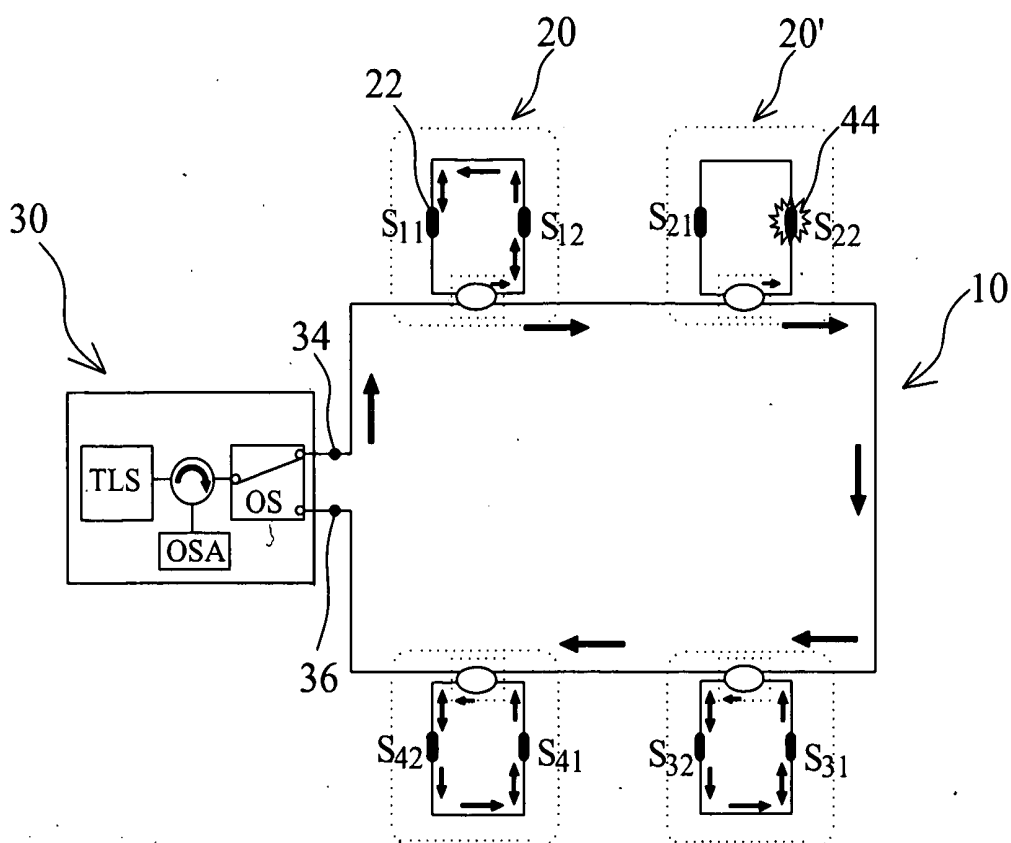


Fig. 5(a)

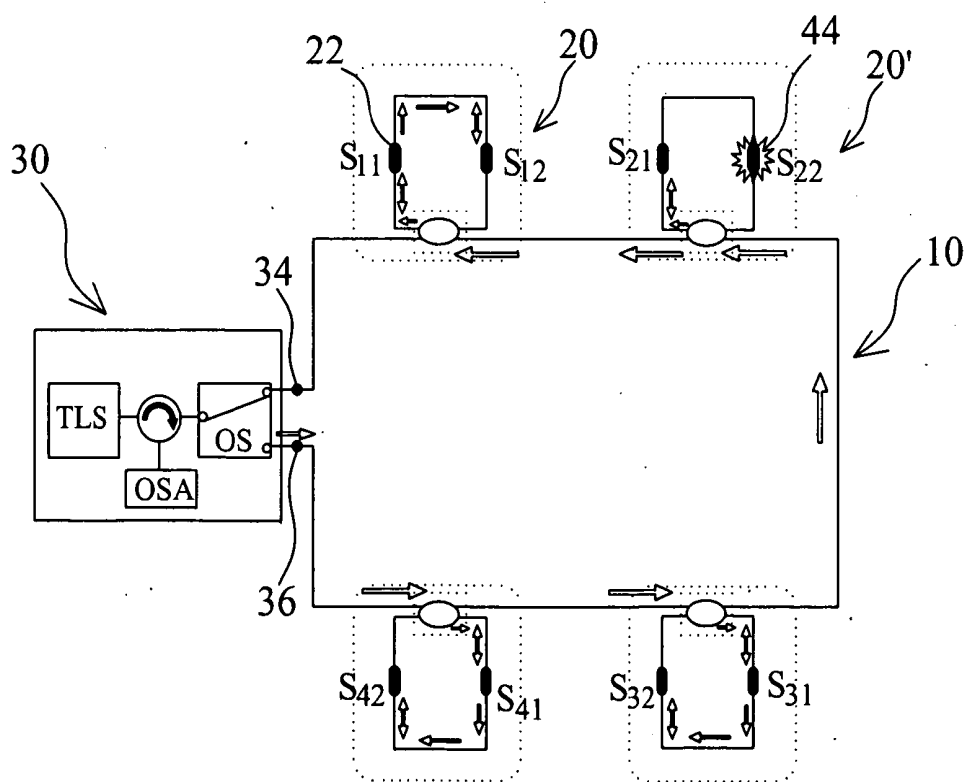


Fig. 5(b)

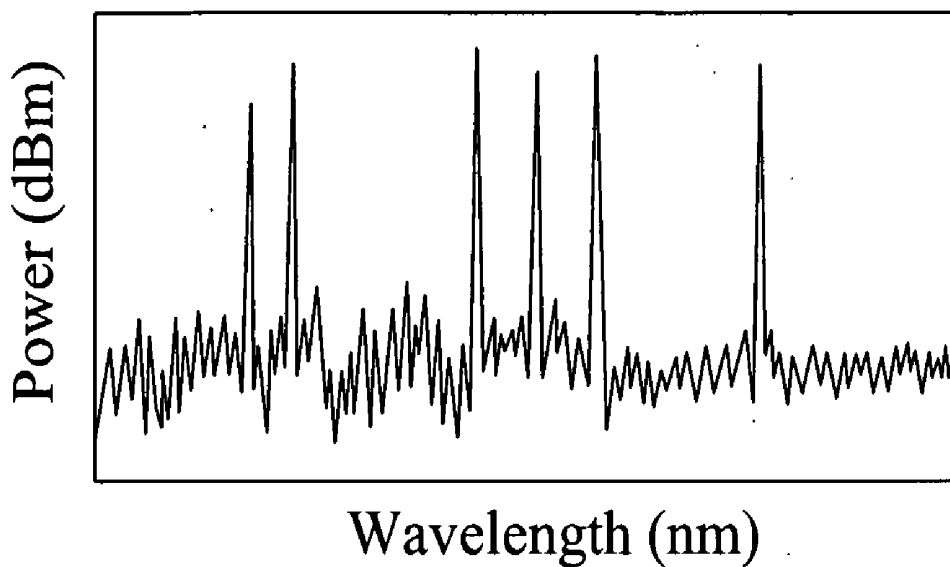


Fig. 5(c)

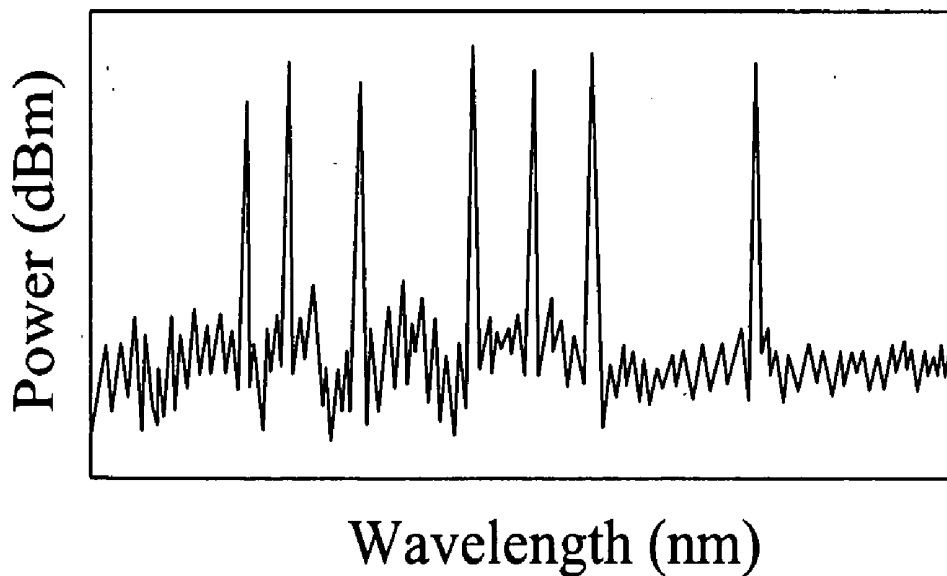


Fig. 5(d)

FIBER SENSING SYSTEM WITH SELF-DETECTION MECHANISM

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a fiber network system, particularly to a fiber sensing system with self-detection mechanism that is able to detect fiber network system and enhance overall transmission reliability of a network.

[0003] 2. Description of the Related Art

[0004] In recent years, Fiber Bragg Grating (FBG) has become an important element in the field of optical sensing. Among the sensing system that using FBG primarily, the ability of providing diversified division multiplexing is one of most important characteristic for those sensing systems. FBG within the applications of division multiplexing includes wavelength-division multiplexing (WDM), space-division multiplexing (SDM), time-division multiplexing (TDM), code-division multiple access (CDMA), strength wavelength-division multiplexing and frequency-modulated continuous-wave (CW) multiplexing. Based on the existing division multiplexing technology and their ability to combine with each other, long range FBG sensing system can be easily manufactured. Therefore, how to enhance reliability and survivability of the FBG sensing system becomes an important issue recently. In general, network using architecture such as bus (in-line) topology, tree (star) topology and ring topology is unable to provide protection function to the sensing system. For instance, when a fault point appears on a fiber line with bus topology, the fiber sensor is no longer able to provide any sensing for any part of the fiber line after the fault point. In order to maintain the survivability of the FBG sensing system and operation of sensing mechanism to avoid the situation caused by environmental issue such as the fault point, it is essential to create a self-restored mechanism within the actual fiber sensing application.

[0005] In the paper "J. Lightwave Technol (2001), p 32" proposed by W. P. Lin, it mentioned a sensing architecture that combined the tree topology and the ring topology. Then in 2003, P. C. Peng added a self-restored mechanism to the sensing architecture mentioned above and the experiment result was proposed in the paper "IEEE Photon. Technol. Lett. vol. 15 (2003), p. 1270." However, such self-restored mechanism for the sensing network requires an additional active component on every remote node (RN) of the network, making the topology of the whole fiber network more complex and also increases the manufacture cost of the network. If there is a simpler FBG multi-ring fiber sensing system that has an ability of self protection (restoration), it would be able to solve many problems when multi-ring architecture network encounters disconnection. Such self-restoration mechanism can be executed quickly and provide users with wider and higher range of reliability, thus decrease production and maintenance cost of the network.

[0006] To overcome the abovementioned problem, the present invention proposes a novel fiber sensing system with self-detection mechanism that is able to overcome the obstacles encountered by the prior arts.

SUMMARY OF THE INVENTION

[0007] The primary objective of the present invention is to provide a fiber sensing system with self-detection mechanism which uses tunable laser as source of light in order to provide

better reliability for wide-range sensing system. When there is an error occurred within the network connection architecture, the self-detection mechanism will execute sensing and restoration mechanism immediately.

[0008] Another objective of the present invention is to provide a fiber sensing system with self-detection mechanism that can greatly enhance survivability and sensing capacity of all fiber sensors, so that when a fault point caused by environmental change within the fiber, it will not effect the overall operation of the sensing mechanism. The application of fiber sensor can also reduce cost and complexity of the overall fiber network topology.

[0009] In order to realize objectives mentioned above, the fiber sensing system with self-detection mechanism of the present invention comprises a primary ring architecture and a central office. The primary ring architecture is formed by multiple secondary ring architectures which are connected to each other serially to form a primary loop. The secondary ring architecture includes at least two fiber sensors which can receive and reflect light source signal and a remote node. The remote node has an optical coupler which allows the light source signal to pass the fiber sensor to form a secondary loop, additionally the remote node can connect to adjacent secondary ring architectures. The primary function of central office is to provide and monitor the light source signal. The central office also has an optical switch wherein the optical switch has two outputs that connect to the primary ring architecture, forming a first path and a second path respectively. The optical switch can switch the traveling of the light source signal between the first path and the second path. The central office also comprises a tunable laser light source and an optical circulator, where the tunable laser light source emits the light source signal to the optical switch through the optical circulator, the optical switch can then switch the path of the light source signal to either first path or second path. The central office further includes an optical spectrum analyzer which is connected to the optical circulator. The fiber sensor mentioned above is Fiber Bragg Grating (FBG). The tunable laser light source is first dispersed into multi-light source and delivered to each remote node, then to the fiber sensor through the optical coupler on the remote node. Since the fiber sensor has reflective ability, all light source signal sent by the tunable laser light source will be detected and measured by the fiber sensor. If there is no fault point on the primary ring architecture and the secondary ring architecture, central office can detect all signals reflected by the fiber sensor. The fiber sensing system with self-detection mechanism of the present invention utilizes central office to control the secondary ring architecture formed by the fiber sensor, the remote node and the optical coupler primarily, the secondary ring architecture is connected serially to form a primary ring architecture. The central office has a tunable laser light source, the tunable laser light source is first dispersed into multi-light source and delivered to each remote node, then to the fiber sensor through the optical coupler on the remote node. Since the fiber sensor has reflective ability, all light source signal sent by the tunable laser light source will be detected and measured by the fiber sensor. If there is no fault point on the primary ring architecture and the secondary ring architecture, central office can detect all signals reflected by the fiber sensor and produce a spectrum. Not only does the present invention provides wider-range and multi-point detection, it also greatly reduce the manufacture cost of the optical network.

[0010] Below, the embodiments are described in detail in cooperation with the attached drawings to make easily understood the objectives, technical contents, characteristics and accomplishments of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is a diagram schematically showing the system architecture of the present invention;

[0012] FIG. 2(a) is a diagram schematically showing system test of the present invention;

[0013] FIG. 2(b) is a diagram schematically showing spectrum result of the system test of the present invention which has no fault point;

[0014] FIG. 3(a) is a diagram schematically showing system test of the present invention that has a fault point on the primary ring architecture;

[0015] FIG. 3(b) is a diagram schematically showing spectrum result of the system test of the present invention which has fault point;

[0016] FIG. 4(a) is a diagram schematically showing system test of the present invention that has a fault point on the secondary ring architecture;

[0017] FIG. 4(b) is a diagram schematically showing system test of the present invention that has a fault point on the secondary ring architecture;

[0018] FIG. 4(c) is a diagram schematically showing spectrum result of the system test of the present invention which has fault point;

[0019] FIG. 4(d) is a diagram schematically showing spectrum result of the system test of the present invention which has fault point;

[0020] FIG. 5(a) is a diagram schematically showing system test of the present invention that has a fault point on the fiber sensor;

[0021] FIG. 5(b) is a diagram schematically showing system test of the present invention that has a fault point on the fiber sensor;

[0022] FIG. 5(c) is a diagram schematically showing spectrum result of the system test of the present invention which has fault point; and

[0023] FIG. 5(d) is a diagram schematically showing spectrum result of the system test of the present invention which has fault point.

DETAILED DESCRIPTION OF THE INVENTION

[0024] FIG. 1 is a diagram schematically showing the system architecture of the present invention, as the figure shows, the present invention is a fiber sensing system with self-detection mechanism, primarily comprises a primary ring architecture 10 and a central office 30. The primary ring architecture 10 is formed by multiple secondary ring architectures 20 which are connected to each other serially to form a primary loop. The secondary ring architecture 20 includes at least two fiber sensors 22 (the following will use S_{11} , S_{12} , S_{21} , S_{22} , S_{31} . . . etc to denote each fiber sensor) which can receive and reflect light source signal and a remote node 24. The remote node has an optical coupler 26 which allows the light source signal to pass the fiber sensor 22 to form a secondary loop, additionally the remote node 24 can connect to adjacent secondary ring architectures. Suppose the primary ring architecture 10 has m secondary ring architecture 20 and each secondary ring architecture 20 has n fiber sensor 22. If every remote node 24 uses a 2x2 optical coupler 26 which makes

the fiber sensor 22 to form a loop and connects to adjacent secondary ring architecture such as 20' and 20" through remote node 24, the system will have mxn sensors. The primary function of central office 30 is to provide and monitor the light source signal. The central office 30 also has an optical switch 32 wherein the optical switch 32 has two outputs that connect to the primary ring architecture 10, forming a first path 34 and a second path 36 respectively. The optical switch 32 can switch the traveling of the light source signal between the first path 34 and the second path 36. The central office 30 also comprises a tunable laser light source 38 and an optical circulator 40, where the tunable laser light source 38 emits the light source signal to the optical switch 32 through the optical circulator 40, the optical switch 32 can then switch the path of the light source signal to either first path 34 or second path 36. The central office 30 further includes an optical spectrum analyzer 42 which is connected to the optical circulator 40. The fiber sensor 22 of the present invention mentioned above is Fiber Bragg Grating (FBG) and the tunable laser light source 38 of the present invention can be a tunable erbium-fiber laser or any kind of laser light source.

[0025] FIG. 2(a) is a diagram schematically showing system test of the present invention. In one of the embodiments, a simple experiment was set up to analyze the fiber sensing system with self-detection mechanism. Suppose m and n is 4 and 2 respectively, which means there are total of eight fiber sensor 22 installed in this architecture, in addition, each fiber sensor 22 is being used as a reflective component. All light signal with different wavelength emitted by the tunable laser light source 38 within the central office 30 will all be detected by the fiber sensor 22. The Bragg wavelengths for those eight FBGs are 1526.63, 1528.87, 1532.64, 1536.57, 1538.24, 1541.88, 1545.83 and 1555.85 nm respectively. In addition, when there an external stress and temperature interferes with the Bragg wavelength of the fiber sensor 22, the sensing system of the present invention can still measure the wavelength accurately. Under normal circumstances, optical switch 32 is connected to the first path 34, so that all lasing wavelength from central office 30 will detect all fiber sensor 22 through the first path 34. The arrow sign in the figure represents sensing path of the whole sensing system from the first path 34 when there is no fault point; If the fiber sensor 22 is being assigned relative numbers from fiber sensor S_{11} to fiber sensor S_{42} , the signal spectrum from tunable laser light source 38 which is being reflected from fiber sensor S_{11} to fiber sensor S_{42} can produce spectrum diagram like FIG. 2(b). FIG. 2(b) is a diagram schematically showing spectrum result of the system test of the present invention which has no fault point, as the figure shows, when there is no fiber fault point in the system, the central office 30 can completely detect all reflected signals generated by the eight fiber sensors.

[0026] In the sensing system of the preferred embodiment, there are primary three places which fault point may occur within the fiber network, those places are connection fiber of primary ring architecture 10, connection fiber of secondary ring architecture 20 or fiber sensor 22 itself, the following paragraph will analyze and discuss these three types of fault point and how the present invention can provide relative self protection mechanism when they occurs.

[0027] FIG. 3(a) is a diagram schematically showing system test of the present invention that has a fault point on the primary ring architecture, as the figure shows, a fault point 44 occurs between fiber sensor S_{22} and fiber sensor S_{31} on the primary ring architecture 10. The original sensing signal sent

out from first path **34** (denoted by solid arrow sign in the figure) will only sense fiber sensor S_{11} , fiber sensor S_{12} , fiber sensor S_{21} and fiber sensor S_{22} . In order to detect the rest fiber sensor **22** signals, optical switch **32** will automatically switch the sensing path to second path **36** (denoted by hollow arrow sign in the figure). The system will then use the second path **36** to proceed sensing to the fault point **44** and sense out the rest of signals. The location of fault point **44** can be more clearly seen from the spectrum as FIG. **3(b)** shows. FIG. **3(b)** is a diagram schematically showing spectrum result of the system test of the present invention which has fault point, wherein solid lines represent signals detected by the first path **34** and dotted lines represents signals detected by the second path **36**. Referred **3(b)** to **3(a)** at same time, since first path **34** (denoted by solid arrow sign in the figure) can not detect any signal beyond fiber sensor S_{22} and second path **36** (denoted by hollow arrow sign in the figure) can not detect any signal before fiber sensor S_{31} , from the information given above, the system can determine that the location of the fault point is between fiber sensor S_{22} and fiber sensor S_{31} . As a result, the fiber sensing system with self-detection mechanism mentioned above not only is able to protect the primary ring architecture **10** from problems caused by the broken fiber, it can also detect approximate fault point location.

[0028] Both FIGS. **4(a)** and **4(b)** are diagrams schematically showing system test of the present invention that has a fault point on the secondary ring architecture. When sensing uses first path **34** (denoted by solid arrow sign in the figure) to proceed transmission, as FIG. **4(a)** shows, if a fault point **44** occurs between fiber sensor S_{21} and fiber sensor S_{22} on the secondary ring architecture **20'**, the first path **34** will unable to detect signal of fiber sensor S_{21} , which make central office **30** to switch to second path **36** (denoted by hollow arrow sign in the figure). As FIG. **4(b)** shows, central office **30** receives all reflected signals and produces sensing spectrum, in addition, central office **30** has already opened second path **36**. Both FIGS. **4(c)** and **4(d)** both are diagrams schematically showing spectrum result of the system test of the present invention which has fault point. Compare the spectrum diagram produced from first path **34** on FIG. **4(c)** with the spectrum diagram produced from second path **36** on FIG. **4(d)**, because first path **34** is unable to detect signal of fiber sensor S_{21} and second path **36** can not detect signal of fiber sensor S_{22} , the system is thus able to determine that the location of the fault point **44** is between fiber sensor S_{21} and fiber sensor S_{22} .

[0029] Both FIGS. **5(a)** and **5(b)** are diagram schematically showing system test of the present invention that has a fault point on the fiber sensor. If stress or temperature around fiber sensor **22** changes due to environmental change or human error, it may shift the Bragg wavelength of the sensor. When those changes exceed the maximum limit which the fiber sensor **22** can tolerate; it will cause fiber sensor **22** to break. The sensing system of the present invention can also detect fault point in the situation like this. As FIG. **5(a)** shows, when sensing uses first path **34** (denoted by solid arrow sign in the figure) to proceed transmission, if fiber sensor S_{22} itself is broken, it will produce a sensing spectrum like FIG. **5(c)**. Both FIGS. **5(c)** and **5(d)** are diagram schematically showing spectrum result of the system test of the present invention which has fault point. In FIG. **5(c)**, since fiber sensor S_{22} within the first path **34** is broken, signals from fiber sensor S_{22} and fiber sensor S_{21} will be unable to be detected. Back to FIG. **5(a)**, in order to regain the two missing signals, central office **30** will automatically switch to second path **36** (denoted

by hollow arrow sign in the figure) as FIG. **5(b)** shows. Compare two paths from FIGS. **5(c)** and **5(d)** now, it can be seen that signal of fiber sensor S_{22} is missing from the spectrum diagram of the second path, thus the system is able to determine that the fault point occurs on the fiber sensor S_{22} itself. In addition, if fiber sensor S_{22} and fiber sensor S_{32} is broken at same time when using first path **34** to proceed transmission, the sensing spectrum will miss sensor signals of fiber sensor S_{21} , fiber sensor S_{22} , fiber sensor S_{31} and fiber sensor S_{32} . When the system switch to second path **36** to proceed sensing, it will still see that signal from fiber sensor S_{22} and fiber sensor S_{32} is still missing. Thus the sensing system of the present invention can also detect two or more broken sensors.

[0030] The fiber sensing system with self-detection mechanism of the present invention utilizes central office to control the secondary ring architecture formed by the fiber sensor, the remote node and the optical coupler primarily. The secondary ring architecture is connected serially to form a primary ring architecture. The central office has a tunable laser light source, the tunable laser light source is first dispersed into multi-light source and delivered to each remote node, then to the fiber sensor through the optical coupler on the remote node. Since the fiber sensor has reflective ability, all light source signal sent by the tunable laser light source will be detected and measured by the fiber sensor. If there is no fault point on the primary ring architecture and the secondary ring architecture, central office can detect all signals reflected by the fiber sensor and produce a spectrum for analyzing fault point locations. Not only does the present invention provides wider-range and multi-point detection, it also greatly reduce the manufacture cost of the optical network.

[0031] The embodiments described above are only to exemplify the present invention but not to limit the scope of the present invention. Therefore, any equivalent modification or variation according to the shapes, structures, characteristics and spirits discloses in the present invention is to be also included within the scope of the present invention.

What is claimed is:

1. A fiber sensing system with self-detection mechanism comprising:

a primary ring architecture, said primary ring architecture includes multiple secondary ring architectures which are connected to each other serially to form a primary loop, said secondary ring architecture comprises:

at least two fiber sensors, which are able to receive and reflect light source signal; and

a remote node, said remote node connects to said fiber sensors and includes an optical coupler which allows a light source signal to pass through said fiber sensors, forming a secondary loop, said remote node is connected to adjacent secondary loop; and

a central office, used to provide said light source signal and a sensing light source signal, said central office includes an optical switch, said optical switch has two outputs connected to said primary ring architecture, forming a first path and a second path respectively, said optical switch is able to switch traveling path of said light source signal between said first path or said second path.

2. The fiber sensing system with self-detection mechanism according to claim 1, wherein said central office comprises a tunable laser light source and an optical circulator, said tunable laser light source emits said light source signal to said

optical switch through said optical circulator, using said optical switch to switch path between said first path or said second path.

3. The fiber sensing system with self-detection mechanism according to claim 1, wherein said central office further comprises an optical spectrum analyzer, which connects to said optical circulator.

4. The fiber sensing system with self-detection mechanism according to claim 1, wherein said fiber sensors are Fiber Bragg Grating (FBG).

5. The fiber sensing system with self-detection mechanism according to claim 2, wherein said tunable laser light source is first dispersed into multi-light source and delivered to said remote node, then to said fiber sensor through said optical coupler on said remote node.

6. The fiber sensing system with self-detection mechanism according to claim 1, wherein said fiber sensors have reflective ability, all of said light source signal sent by said tunable laser light source will be detected and measured by said fiber sensors, if said primary ring architecture and said secondary ring architecture has no fault point, said central office can detect all signals reflected by said fiber sensors.

7. The fiber sensing system with self-detection mechanism according to claim 1, wherein when said light source signal traveling on said first path encounters fault point on said primary ring architecture, said optical switch will automatically switch to said second path and proceed with sensing.

8. The fiber sensing system with self-detection mechanism according to claim 7, wherein said central office uses said

fiber sensors traveling path of said first path and said second path to determine location of said fault point.

9. The fiber sensing system with self-detection mechanism according to claim 1, wherein when said light source signal traveling on said first path encounters fault point on said secondary ring architecture, said optical switch will automatically switch to said second path and proceed with sensing.

10. The fiber sensing system with self-detection mechanism according to claim 9, wherein said central office uses said fiber sensors traveling path of said first path and said second path to determine location of said fault point.

11. The fiber sensing system with self-detection mechanism according to claim 1, wherein when said light source signal traveling on said first path encounters fault point caused by one of broken said fiber sensors, said optical switch will automatically switch to said second path and proceed with sensing.

12. The fiber sensing system with self-detection mechanism according to claim 11, wherein said central office uses said fiber sensors traveling path of said first path and said second path to determine which said fiber sensor(s) is/are broken.

13. The fiber sensing system with self-detection mechanism according to claim 2, wherein said tunable laser light source is tunable erbium-fiber laser.

* * * * *