

行政院國家科學委員會專題研究計畫 成果報告

腦部結構磁共振造影影像量化分析與模板建立 研究成果報告(精簡版)

計畫類別：個別型
計畫編號：NSC 98-2221-E-009-147-
執行期間：98年08月01日至99年07月31日
執行單位：國立交通大學資訊工程學系(所)

計畫主持人：陳永昇
共同主持人：陳麗芬、葉子成、謝仁俊
計畫參與人員：碩士級-專任助理人員：顏毓萱
學士級-專任助理人員：謝心怡
碩士班研究生-兼任助理人員：王清偉
碩士班研究生-兼任助理人員：李國維
碩士班研究生-兼任助理人員：王億婷
碩士班研究生-兼任助理人員：林家萍
博士班研究生-兼任助理人員：鄭詠成

報告附件：出席國際會議研究心得報告及發表論文

處理方式：本計畫可公開查詢

中華民國 99 年 10 月 31 日

Multiresolutional Graph Cuts for Brain Extraction from MR Images

Yi-Ting Wang

Department of Computer Science
National Chiao Tung University
Hsinchu, Taiwan
Email: wyt328@gmail.com

Yong-Sheng Chen

Department of Computer Science
National Chiao Tung University
Hsinchu, Taiwan
Email: yschen@cs.nctu.edu.tw

Li-Fen Chen

Institute of Brain Science
National Yang-Ming University
Taipei, Taiwan
Email: lfchen@ym.edu.tw

Abstract—We proposed a multiresolutional brain extraction framework which utilize graph cuts technique to classify head magnetic resonance (MR) images into brain and non-brain regions. Our goal is to achieve both high sensitivity and specificity results of brain extraction. Started with an extracted brain with high sensitivity and low specificity, we refine the segmentation results by trimming non-brain regions in a coarse-to-fine manner. The extracted brain at the coarser level will be propagated to the finer level to estimate foreground/background seeds as constraints. The short-cut problem of graph cuts is reduced by the proposed pre-determined foreground from the coarser level. In order to consider the impact of the intensity inhomogeneities, we estimated the intensity distribution locally by partitioning volume images of each resolution into different numbers of smaller cubes. The graph cuts method is individually applied for each cube. The proposed method was compared to four existing methods, Brain Surface Extractor, Brain Extraction Tool, Hybrid Watershed algorithm, and ISTRIP, by using four data sets, the first and the second IBSR data set of the Internet Brain Segmentation Repository, BrainWeb phantom images from the Montreal Neurological Institute, and healthy subjects collected by Taipei Veterans General Hospital. The performance evaluation for brain extraction, our method outperforms others for the first/second IBSR data set and BrainWeb phantom data set, and performs comparably with the BET and ISTRIP methods when using the VGHTPE data set.

I. INTRODUCTION

Accurate brain extraction is important to voxel-based morphology (VBM) [1] and neuroimaging studies. VBM of magnetic resonance (MR) image is a powerful and non-invasive method to investigate human brain in vivo, it compares the concentration of GM or WM regionally in cross-sectional (the same time between groups) or longitudinal (the same group at different times) manner to describe ageing [2] or diseases, such as schizophrenia, bipolar disorder, and Alzheimer's [3] [4]. The VBM procedure can be separated into following steps: brain extraction, intensity inhomogeneity correction, tissue segmentation, registration, and voxel based analysis. Brain extraction is the work of excluding non-brain tissues such as skull, muscle, and fat. Intensity inhomogeneity correction, tissue segmentation, registration, and voxel based analysis are all benefit from brain extraction. And the accuracy of above processes is important to neuroimaging studies, such as cortical thickness analysis [5].

A. Related works of brain extraction

Many methods have been proposed to solve the brain extraction problem. These methods can be classified into four classifications: intensity-based approaches, edge-based approaches, deformable approaches, and hybrid approaches.

Intensity-based approaches use the threshold of brain/non-brain to achieve brain extraction. This method is sensitive to noise or intensity inhomogeneity. Watershed (WAT) describes the high intensities as hill and the low intensities as valley, and if a valley between two regions then they are separated. But watershed may results in over-segmentation caused by noise that separate brain into too many regions. To solve over-segmentation, it's necessary to merge those regions that belong to the same structure by postprocess [7]. Pre-flooded WAT [7] proposed a pre-flooding approach to tackle the problem of over-segmentation. They inverted the intensity value of original image, and merged basin with height less than certain intensity value. The disadvantage of this method is that sometimes the results contain some eye skull or exclude parts of the cerebellum.

Edge-based approaches use gradient to locate the boundary between brain/non-brain, but may cause some errors in temporal since there are strong gradient to separate temporal and cerebellum. Brain Surface Extractor (BSE) [8] uses anisotropic diffusion filtering to smooth noise, Marr-Hildreth edge detector to produce closed contours, and refines the result by mathematical morphology.

Deformable approaches is a method of brain extraction by deforming a rough surface to the brain surface. BET [6] finds a brain/non-brain threshold, initial a triangular tessellation of a sphere's surface at center of gravity (COG), and finally iteratively deforms to the brain surface. ISTRIP [10] initializes an ellipsoid by finding the effective intensity range, then uses Wendland's radial basis function (RBFs) deforming to the brain surface.

Hybrid approaches combine methods of different types to segment brain/non-brain. For the purpose of correcting the method of WAT, HWA combines pre-flooded WAT and deformable surface model to get better accuracy of brain extraction. HWA first perform the pre-flooded WAT to obtain an rough brain extraction and this brain as initial of deformable

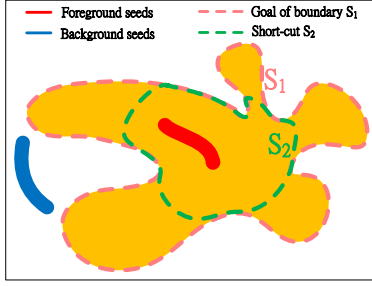


Fig. 1. Short-cut problem of graph cuts. S_1 is the goal of boundary and S_2 is the short-cut path. Although the edge weights of n-links on the goal of boundary S_1 are smaller than those on the short-cut path S_2 , however, the boundary S_1 is too long cause the cost is bigger than short-cut S_2 . Therefore, graph cuts may result in short-cut S_2 instead of boundary S_1 .

surface model, then warp a accurately segmented brain atlas to the result of the pre-flooded WAT by rigid registration and deform to the accurate surface in the end. HWA is benefits of robust by using the pre-flooded WAT and geometric constraints of deformable surface model but is too conservative and still containing lots of non-brain.

B. Graph cuts

Graph cuts is a method for separating foreground and background and is similar to max-flow min-cut theorem. The difference is that in graph cuts, each vertices has an edge (t-link) connected to source S, an edge connected to sink T and an edge (n-link) between neighboring vertices.

When we use graph cuts, the first step is to select foreground seeds and background seeds. And then we assign edge weights as capacity. The weight of n-link is according the difference of gray value or color between neighboring points. The weight of t-link is according the similarity to foreground seeds and background seeds. If the intensity of a node is like to foreground seeds than the weight of t-link connected to source S is big that means this node has more chance be classified as foreground and vise versa. Finally, according to the weights of t-link and n-link, we can get a cut to partition foreground and background by graph cuts algorithm.

Short-cut is a well-known problem in graph cuts and mostly occur in thin and long region. Short-cut problem means that the cost of desired boundary is bigger than the short-cut path that misclassification happened. Figure1 is an example of the short-cut problem. This problem can be solved by combining geodesic information and graph cuts algorithm [13].

Based on [12], many applications of graph cuts were published. Whatever no methods are perfect, therefore, user interactive tools often come with graph cuts [14] [15] [16] [17] [18]. Video Snap Cut [19] mentioned that graph cuts with global statistics can't handle complexity scene therefore they segment with localized classifiers. The user will roughly define the foreground and background on key frame, and get a initial result. The localized classifiers then surround along

the initial result. Each localized classifiers will combine local information to get a segmentation. These localized classifiers will propagate to next frame based on optical flow and update their local statistic. For refining the result of graph cuts, [17] also provides a tool to compute local color distribution.

For decreasing the cost of graph cuts algorithm, Multilevel banded graph cuts (BGC) [20] run full grid graph cuts with the coarsest image and get an initial object, then refine the initial object in a coarse-to-fine manner and graph cuts only operate in a band which between eroded and dilated the object. In this way, we can decrease memory usage and time cost but might exclude some thin structures such as blood vessels showed in the experiment of 3-D heart and pulmonary artery CT volume. To tackle the problem of BGC, [21] presented a accurate multilevel BGC by identifying thin structures and adding to BGC system when fining the lower resolution object.

C. Motivation of this work

In the existing brain extraction methods, some have high sensitivities whereas some have high specificities. The high sensitivity stands for extracting large percent of the brain region, and the high specificity value rejects large percent of the non-brain region. The pursuits of high sensitivity and high specificity are generally conflicting. How to comprise between high sensitivity and high specificity is essential to accurate brain extraction. HWA method has the advantage of high sensitivity, but the disadvantage is its low specificity. In this work, we planned to develop an accurate brain extraction algorithm by using the brain region estimated by HWA method as the initial. While maintaining high sensitivity, our algorithm achieves high specificity by trimming non-brain regions from the initials with multiresolutional graph cuts.

II. METHOD

A. Flowchart of multiresolutional brain extraction

The proposed brain extraction method is composed of three major steps, as shown in Figure 2. First, we apply the HWA method to initialize the brain region as the roughly extracted brain. In the image of the roughly extracted brain, we remove non-WM voxels with high intensities by segmenting the WM tissue with region growing and excluding those voxels brighter than the segmented WM tissue. This volume is denoted by V^L , where V^L represents that this volume is at level L , in this thesis. The deleted voxels are usually non-brain voxels, such as fat.

The second step is the multiresolutional graph cuts and the advantage of multiresolutional framework to this work is that we can use the result of coarser levels as constraints to finer levels. We downsample V^L image into lower-resolution ones, and from fine to coarse levels are $V^{L-1}, V^{L-2}, \dots, V^0$, as shown in Figure 3. The eight voxels in $L-l$ level (a $2 \times 2 \times 2$ cube) are combined into one voxel in $L-(l+1)$ level, $l = 0, 1, \dots, L-1$. We start the multiresolutional graph cuts from the coarsest level. The shape of brain in this level is much easier to obtain, because of the brighter voxels not belonging to brain are blurred. To prevent short-cut problem in graph cut,

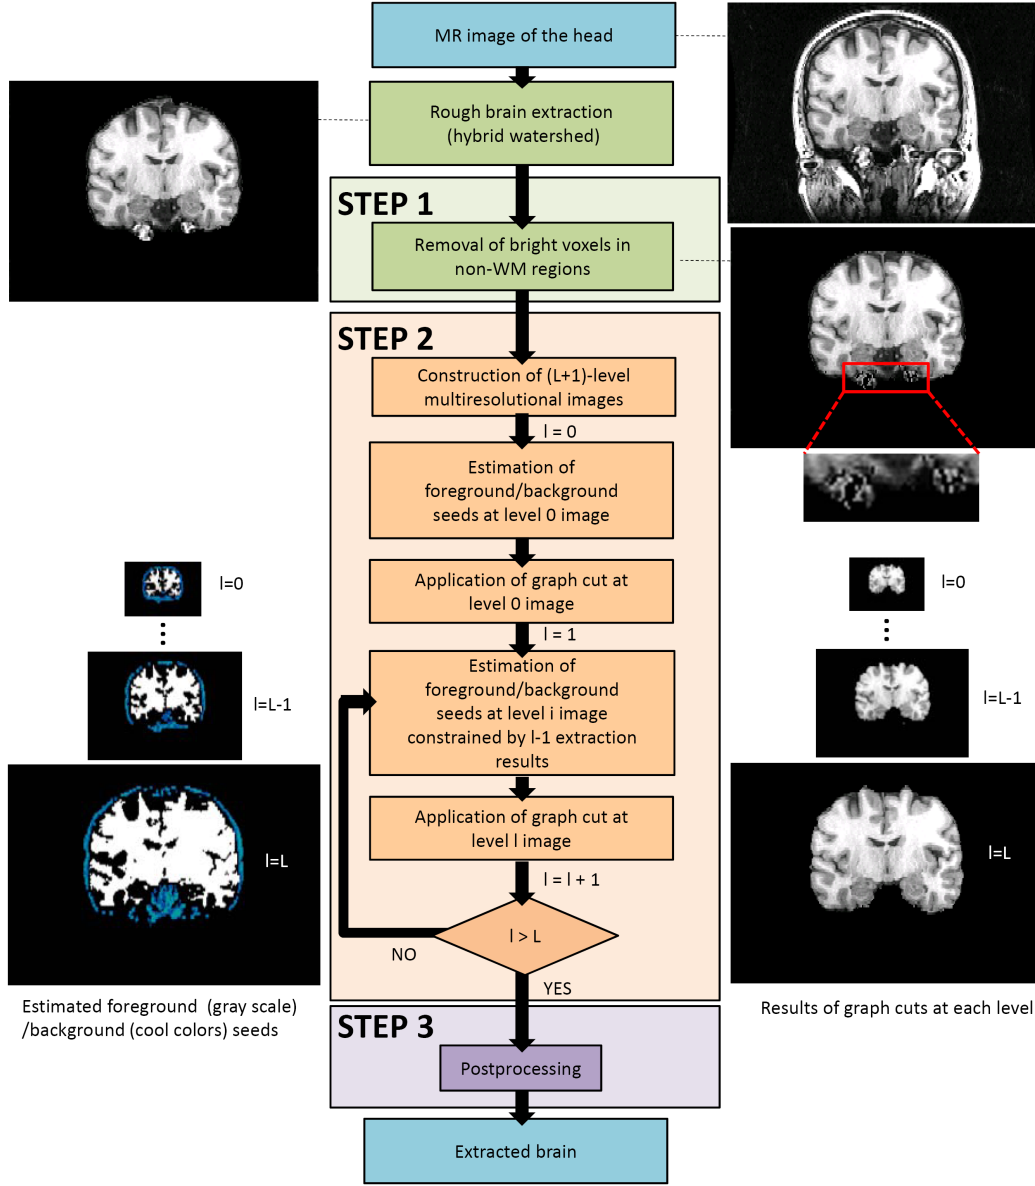


Fig. 2. Flowchart of the proposed brain extraction method.

the best foreground seeds should cover the object as much as possible. Hence, we take the WM as our foreground seeds at the level 0. And the estimation of foreground/background seeds at finer levels are constrained by upper level extraction results.

At the final step, we fill holes, which are background areas surrounded by foreground areas in coronal view. Since the darker voxels in the ventricles might be classified as background by the graph cuts algorithm and the deleted voxels in the first step might include some voxels of WM, and resulting in scattered holes.

There will be more details of removing the bright voxels in non-WM regions, multiresolutional graph cut and the final step in the following sections for the above steps.

B. Removal of bright voxels in non-WM regions

The foreground seeds are determined by intensity distribution, which may be affected by the voxels with high intensities. Therefore, before application of graph cuts algorithm, we delete those bright voxels according to the estimated WM intensity distribution. We use 3-D region growing and Otsu's [25] method to estimate the WM tissue in the way similar to [22]. The other reason of removing bright voxels in non-WM regions is that they may be classified as foreground by graph cuts algorithm, because the intensities in non-WM brain regions should not be larger than those of WM regions.

To estimate WM, in our observation, we can partition the results of rough brain extraction into four categories from darker to brighter with three thresholds which were found

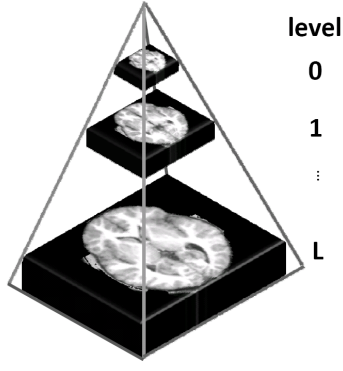


Fig. 3. The multilevel image pyramid.

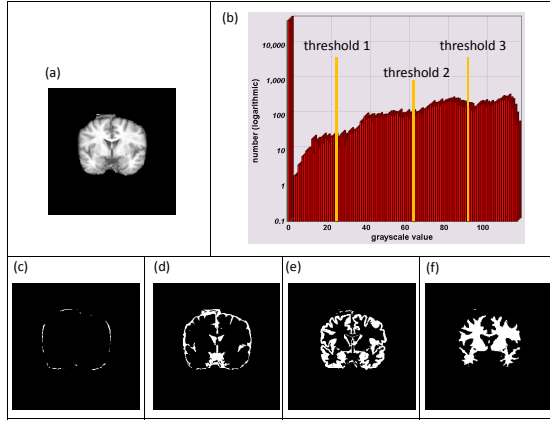


Fig. 4. The four categories by Otsu's method of the initial brain extraction. (a) The result of initial brain extraction. (b) The histogram of single slice and can be classified into four categories by threshold 1, threshold 2 and threshold 3. The horizontal axis is the gray value and the vertical axis is the number of voxels. (c) The first category is below threshold 1 and composed of voxels with gray values like CSF and non-head voxels. This image is shown the nonzero voxels with gray value below threshold 1. (d) The second category is between threshold 1 and threshold 2 and composed of voxels with gray values between those of CSF and GM. (e) The third category is between threshold 2 and threshold 3 and composed of voxels with gray values of GM. (f) The fourth category is greater than threshold 3 and composed of voxels with gray values of WM.

using Otsu's method, as shown in Figure 4. The first category is composed of voxels with gray values like CSF and non-head voxels. The second category is composed of voxels with gray values between those of CSF and GM. The third category is majorly composed of voxels with gray values of GM. The fourth category is majorly composed of voxels with gray values of WM. When gathering statistics of the distribution of gray values, we only consider voxels with gray values lower than T , where T is the gray value higher than 98 percent of total nonzero voxels (similar to [6]). The reason to exclude those voxels with particularly high values is that they may dominate the third threshold of Otsu's [25] method.

For each slice, we apply the Otsu's method described above to determine the three thresholds and the largest threshold is used to segment WM voxels. We start 3-D region growing to

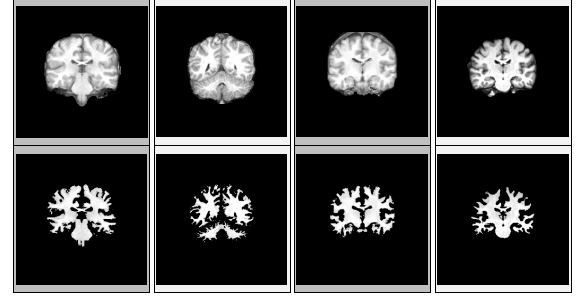


Fig. 5. The results of segmented white matter tissue in coronal slice. Top row are the results of the initial brain extraction. Bottom row are the results of the segmented white matter tissue.

find WM with voxels higher than the threshold between WM and GM for each slices located between 2/5 and 3/5 middle transverse slices. These starting points of region growing locate at the center region of each slices. The center region at superior and inferior transverse slices may be non-brain region, therefore we limit start points between 2/5 and 3/5 middle transverse slices. Since the connectivity of 3-D region growing is higher than that of 2-D region growing, we use a strict threshold t as the stopping criterion of region growing, to avoid from growing WM region to brighter non-brain region. Thus threshold t represents the maximum intensity difference between 3-D neighboring voxels. To improve the accuracy of WM segmentation, we perform 2-D region growing starting from the results of 3-D region growing, and uses the third threshold of Otsu's method and T as the stopping criterion. Figure 5 demonstrates the results of WM segmentation.

To avoid the influence of bright voxels in non-WM region on the intensity distribution, we remove those voxels with gray values larger than the average of estimated WM subtracted by the estimated WM standard deviation. We call this volume V^L , as shown in the bottom row of Figure 6. The reason why we remove those voxels with high gray values is that those voxels most likely belong to a non-brain region, such as fat. These kind of voxels are determined as foregrounds while doing the graph cuts algorithm. Removal of the brighter voxels in the non-WM areas can improve the estimation of WM as well as the brain extraction result.

C. Graph cuts for brain extraction

1) *Edge weights in the graph cuts method:* The proposed method construct a graph at each level and apply the graph cuts algorithm to extract the brain region. In the constructed graph, neighboring voxels have a connected edge, which is denoted by n-link. Besides, each voxel has edges, denoted by t-link, connected to two specific vertices: foreground terminal S and background terminal T as shown in Figure 7. There are two kinds of n-links that need to be assigned with weights, one

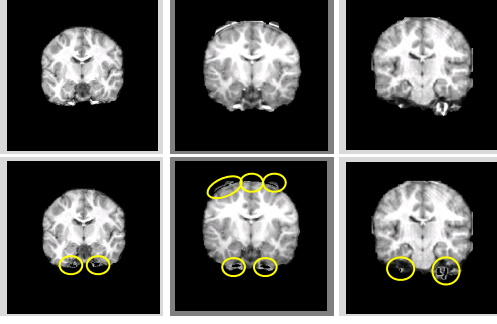


Fig. 6. The result of deleting non-WM voxels with gray values higher than estimated WM. Top row: the results of initial brain extraction. Bottom row: the result of deleting the voxels with gray values higher than estimated WM.

is the inter-n-link and the other is the intra-n-link. Inter-n-link connects voxels in consecutive slices, shown as black lines in Figure 7, and the intra-n-link connects voxels in the same slice, shown as orange lines in Figure 7. For segmentation of foreground and background, we need to assign edge weight for each edge in the constructed graph and apply graph cuts algorithm. According to the weights of t-link and n-link, the graph cuts algorithm will find a global optimal path to classify foreground and background by minimizing the energy function:

$$E = \sum_{(x_i, x_j) \in N} A(x_i, x_j) + \sum_{(x_i, S) \in N, \text{ or } (x_i, T) \in N} B(x_i) . \quad (1)$$

The x_i is a voxel in the image. N is a set of the neighboring voxels x_i and x_j in the path of the graph cut, and $A(x_i, x_j)/B(x_i)$ is the function to assign the weight of n-link/t-link, respectively.

The finest level has different equation of edge weights from other levels. To assign the weight of n-link at coarser levels, the edge weight is assigned as:

$$A(x_i, x_j) = w_n \times \exp\left(-\frac{(I_{x_i} - I_{x_j})^2}{2\alpha^2}\right) , \quad (2)$$

where w_n is a parameter representing the importance of n-link, I_{x_i} and I_{x_j} are the intensity of two adjacent voxels, x_i and x_j , connected by this link. If the difference between I_{x_i} and I_{x_j} is large, then the weight of this link becomes small. Thus, the cut path is more likely to go through this link.

The weight of n-link at the finest level is assigned as:

$$A(x_i, x_j) = w_n \times \exp\left(-\frac{(I_{x_i} - I_{x_j})^2}{2\alpha^2}\right) + w_d \times \left(\frac{D(x_i) + D(x_j)}{2}\right) . \quad (3)$$

In the finest level, we add a distance term $D(x)$ to Eq. (2). The $D(x)$ is defined as the least-squares distance from x to the contour of the extracted brain which is upsampled from the coarser level to the finest level. In this work we use a library which is based on kd-trees and box-decomposition

trees for approximate nearest neighbor searching (ANN) [24] to estimate the distance term.

The parameter value of w_n and w_d for inter slice is half of the value in intra slice, in order to keep the relationship of different slices but not too strong.

For the weight of t-link connected to foreground terminal is defined as:

$$B(x_i) = w_t \times \frac{P_F(x_i)}{P_F(x_i) + P_B(x_i)} , \quad (4)$$

where w_t stands for the importance of this term in contrast to n-link. For each voxel x , $P_F(x_i)$ and $P_B(x_i)$ are its likelihood functions to foreground seeds and background seeds, respectively:

$$P_F(x_i) = \frac{1}{\sqrt{2\pi}\sigma_f} \exp\left(-\frac{(I_{x_i} - \mu_f)^2}{2\sigma_f^2}\right) , \quad (5)$$

$$P_B(x_i) = \frac{1}{\sqrt{2\pi}\sigma_b} \exp\left(-\frac{(I_{x_i} - \mu_b)^2}{2\sigma_b^2}\right) . \quad (6)$$

The σ_f is the standard deviation of foreground seeds, whereas σ_b is set as twice the standard deviation of background seeds for increasing the separability of foreground and background by increasing the background range. The μ_f and μ_b are the average of foreground seeds and background seeds. If voxel I_{x_i} is more likely a background seed, then the t-link connected to the foreground terminal is much easier to be cut, then x has more chance to be classified as a background. The weights of foreground seeds connecting to foreground terminal are set to be infinity and they will be classified as foreground. Similarly, t-link connected to background terminal is defined as:

$$B(x_i) = w_t \times \frac{P_B(x_i)}{P_F(x_i) + P_B(x_i)} . \quad (7)$$

The weights of background seeds connecting to background terminal are set to be infinity and they will be classified as background. The edge weight calculation functions from Eq. 1 to Eq. 7 were modified from those in [12]. We added a distance term in Eq. 3 at the original resolution level. We use the graph cuts algorithm proposed in [23] and the implementation can be found in <http://www.cs.ucl.ac.uk/staff/V.Kolmogorov/software.html>.

D. Multiresolutional graph cuts for brain extraction

For the purpose of multiresolutional graph cut, we down-sample the V^L (the highest resolution) at level L into coarser levels, V^{L-1} , V^{L-2} , ..., V^0 . The equation of downsampling is defined as:

$$V_{x,y,z}^{L-l} = \frac{1}{8} \sum_{i=0}^1 \sum_{j=0}^1 \sum_{k=0}^1 V_{2x+i, 2y+j, 2z+k}^{L-(l-1)} , \text{ for } 1 \leq l \leq L . \quad (8)$$

The $V_{x,y,z}^{L-l}$ is the intensity at coordinate (x, y, z) and at level $L-l$. The number of voxels at $L-(l-1)$ level are 8 times of voxels at $L-l$ level.

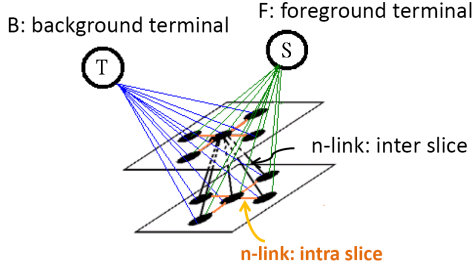


Fig. 7. Demonstration of n-link and t-link. Blue lines are the t-link connecting to background terminal. Green lines are the t-link connecting to foreground terminal. Orange lines are the intra slice n-link (link in the same slice). Black lines are the inter slice n-link (link in different slices).

1) *Graph cuts at the coarsest level:* To get the shape of brain, we start running graph cut with V^0 , which is at the lowest resolution. At this level, the shape of brain is much easier to obtain, because of the brighter voxels that are not belonging to brain were blurred. On the other hand, the brighter voxels (WM) belonging to the brain area are set as foreground seeds, which always be classified as foreground. We use the region growing method, describe in Section 2.1, to segment the WM tissue in V^0 as foreground seeds, as voxels overlaid with warm colors in the middle row of Figure 8. On the other hand, we use the voxels with non-zero gray values and below the lowest threshold as background seeds, as shown as voxels overlaid with cool colors in the middle row of Figure 8. After the graph cut of the entire brain was completed, we get a foreground object, O^0 , as show in bottom row of Figure 8. Then erode O^0 one voxel to get a smaller volume, E^0 , as a constraint to the middle resolution level.

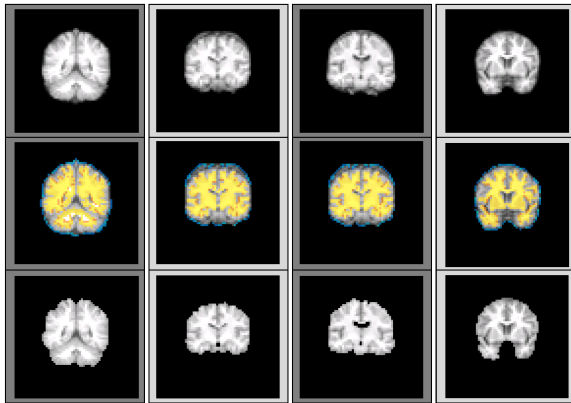


Fig. 8. Demonstration of foreground seeds, background seeds and results at the lowest resolution level. Top row: the volumes are V^0 , individually. Middle row: the warm colors are foreground seeds and cool colors are background seeds. Bottom row: the extracted brain at the lowest resolution level.

2) *Graph cuts at the middle levels:* The graph cuts at middle levels is to refine the extracted brain from the lowest resolution level. At middle dimension level l , $0 < l < L$, to get a pre-determined foreground area we first upsample the eroded brain region, E^{l-1} , at coarser level $l-1$ to level l the

pre-determined foreground area E^l . The upsampling equation of the eroded volume is defined as:

$$E_{x,y,z}^l = E_{\frac{x}{2}, \frac{y}{2}, \frac{z}{2}}^{l-1}, \quad (9)$$

where $E_{x,y,z}^l$ is the intensity at coordinate (x, y, z) and at level l . The weights of t-link connecting to foreground terminal in E^l , as shown in third row of Figure 9, are set to be infinity. This ensures E^l must be classified as foreground. The pre-determined foreground area can reduce the short-cut problem and prevent cut at WM/GM boundary.

Considering local gray value distribution, we partition V^l into $2^l \times 2^l \times 2^l$ cubes (each dimension is divided into smaller overlapping region, as shown in Figure 10). Then we perform graph cut for each cube individually. Each cube has 1/4 in length overlapped with its adjacent cubes, this reduce the inconsistent border between two cubes. Each cube has its own foreground and background seeds. We estimate the three thresholds with each cube by Otsu's method. If the voxel is brighter than the third threshold and contains in E^l then it is be defined as foreground seed, as shown as voxels overlaid with warm colors in the second row of Figure 9. If the voxel intensity is nonzero and smaller than the first threshold then it will be defined as background seed, as shown as voxels overlaid with cool colors in the second row of Figure 9. The bottom row of Figure 9 is the extracted brain at this resolution and we denote this volume as O^l . The eroded O^l is defined as E^l . For the overlapped region between neighboring cubes, we integrate the results by logical OR operation.

3) *Graph cuts at the finest level:* Graph cuts applied at the finest level is to get the final extracted brain. At the finest level, the pre-determined foreground area is the upsampled E^{L-1} , as shown in the third row of Figure 11. We partition V^L into $2^L \times 2^L \times 2^L$ cubes individually and in our method the $L = 2$. Then we perform graph cuts algorithm with each cube. The way of finding foreground seeds and background seeds is the same as in the middle levels, as shown in the second row of Figure 11. We also upsampling O^{L-1} to this level, called O'^L , as shown in top row cool colors of Figure 11. The equation of upsampling O^{L-1} is defined as:

$$O'_{x,y,z}{}^L = \frac{\sum_{k=-1}^1 O_{\frac{x}{2}, \frac{y}{2}, \frac{z}{2}+k}^{L-1}}{3}, \quad (10)$$

where $O'_{x,y,z}{}^L$ is the intensity at coordinate (x, y, z) and at level L . Different from middle and the coarsest levels, we add a distance term: $w_d \times (\frac{D(x_i)+D(x_j)}{2})$, in Eq. (2.3). The distance term $D(x)$ is defined as the least-squares distance from x to contour of O'^L . The reason is that, the brighter voxels belonging to non-brain region are similar to foreground seeds, so they might be classified as foreground. But in the middle and the coarsest levels, those brighter voxels are blurred, hence those voxels can be judged as background seeds. Therefore, we use the contour of O'^L as a factor of the edge weight in this level because when the n-link is closer to the contour, it should has more chance to be cut. For the overlapped region between neighboring cubes, we integrate the results by logical OR operation.

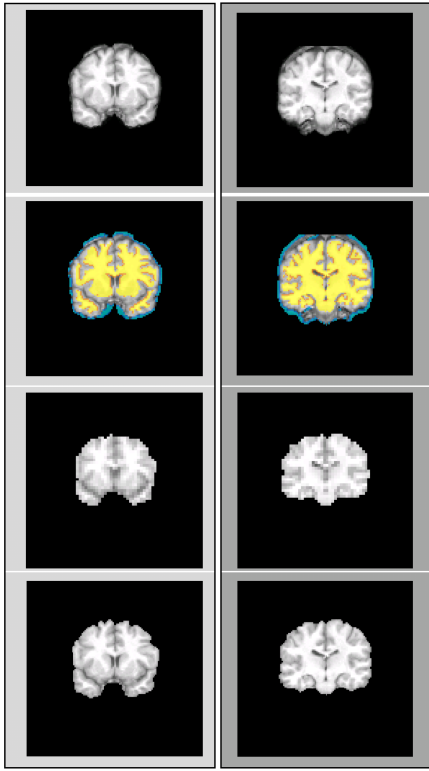


Fig. 9. Demonstration of foreground seeds, background seeds and results at middle levels. Top row: the volume at middle levels. Second row: the warm color is foreground seeds and cool color is background seeds. Third row: the pre-determined foreground which is eroded and upsampled the result at the lowest resolution level. Bottom row: the extracted brain at middle levels.

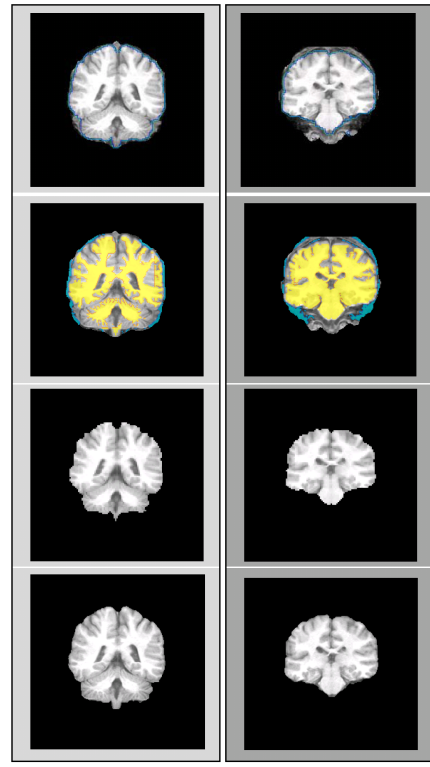


Fig. 11. Demonstration of foreground seeds, background seeds and results at the finest level. Top row: the volume at the highest level and the cool color is contour of O'^L . Second row: the warm color is foreground seed and cool color is background seed. Third row: the pre-determined foreground which is eroded and upsampled the result at the middle level. Bottom row: the extracted brain which is at the finest level.

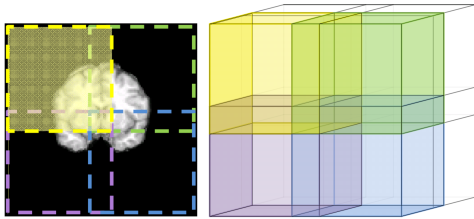


Fig. 10. Demonstration the unit of graph cut at level 1. The region surrounded by yellow, purple, green, and blue dotted line are the unit of graph cut, individually. Each unit perform graph cut once. The left image of this figure is the view in 2-D and the right one is the view in 3-D.

E. Postprocessing to fill holes that dark brain region be classified as background by graph cuts

The final step is to fill holes which are the dark brain areas classified as background regions by graph cuts algorithm, such as ventricles, as shown in Figure 12. The voxels surrounded by foreground regions, as shown in the yellow circle of Figure 13 also need to be filled, because these voxels were wrongly deleted in Step 1 of the system flowchart, since they failed to be included in WM region growing process due to their irregular intensities. The postprocessing is illustrated in Figure 13. We find the contour of the extracted brain from the highest resolution level, including the removed dark brain region, as

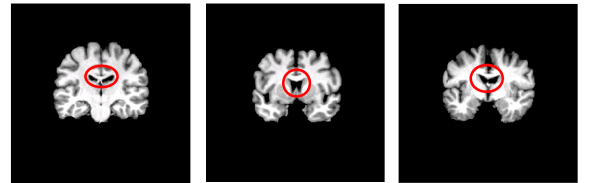


Fig. 12. The red circle is the dark volume may be classified as background that need to be post-processed

shown in Figure 13 (b). Then we take the outermost contour, as shown in Figure 13 (c), and incorporate the voxels inside the contour to fill dark brain regions. Figure 13 (d) shows the result of postprocessing. Notice that this postprocessing is applied on coronal slices.

III. RESULTS

A. Image data sets for performance evaluation

We applied four data sets to compare the accuracy of brain region extracted by using the existing methods, HWA [9], BSE [8], BET [6], ISTRIP [10], and the proposed method. The four data sets are the first and the second Internet Brain Segmentation Repository (IBSR) data set, Taipei Veterans General Hospital (VGATPE) data set, and BrainWeb phantom

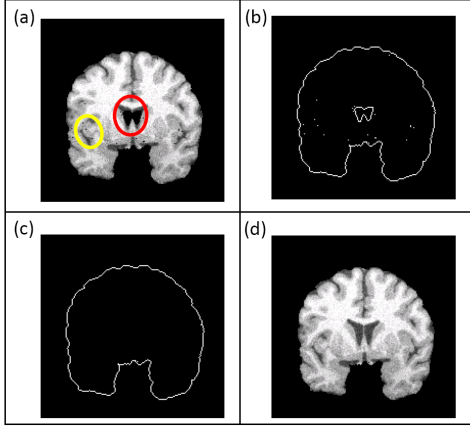


Fig. 13. (a) The red circle is the dark voxels in brain but be classified as background, and yellow circle is the voxels deleted in step1 of flowchart but belong to brain region, that both need to be post-processed. (b) We find contour of the extracted brain from the highest resolution level. (c) Take the outermost contour. (d) Fill the voxels which are inside the outermost contour and the dark voxels in brain are filled.

data set.

The first IBSR data set consist of 20 MR images, each with around 60 coronal slices, matrix size $256 \text{ mm} \times 256 \text{ mm}$, FOV $256 \text{ mm} \times 256 \text{ mm}$, and slice thickness 3.1 mm. The most images in this data set involve apparent intensity inhomogeneity and the large region of neck. The large region of neck may bias the estimation of parameters in the HWA and BET method. Therefore, the large region of neck were manually removed before estimation [10].

The second IBSR data set is composed of 18 MR images, each with around 128 coronal slices, matrix size $256 \text{ mm} \times 256 \text{ mm}$, FOV $240 \text{ mm} \times 240 \text{ mm}$, and slice thickness 1.5 mm. Each image has brain region determined by manual segmentation. The IBSR data sets as well as the brain region images are from the Montreal Neurological Institute and are available at <http://www.cma.mgh.harvard.edu/ibsr>.

The VGATPE data set contains 18 MR volumes of healthy subjects collected by Taipei Veterans General Hospital, each with around 124 coronal slices, matrix size $256 \text{ mm} \times 256 \text{ mm}$, FOV $260 \text{ mm} \times 260 \text{ mm}$, and slice thickness 1.5 mm. The ages of these subjects are between 22 and 57 years old. The brain region images of all subjects are segmented manually.

BrainWeb phantom images from the Montreal Neurological Institute are simulated by various levels of noise and intensity non-uniformity. The noise levels are 0%, 1%, 3%, 5%, 7%, and 9%. Each noise level contains three levels of intensity non-uniformity, which are 0%, 20%, and 40%. Each image with around 217 coronal slices, matrix size $181 \text{ mm} \times 181 \text{ mm}$, FOV $181 \text{ mm} \times 181 \text{ mm}$, and slice thickness 1mm.

B. Evaluation metrics for brain extraction

This work used five coefficients to compare the accuracy of the brain regions extracted from existing methods.

The Jaccard similarity coefficient (JSC) is to measure the similarity of ground truth A and the extracted brain B by the following equation:

$$JSC(A, B) = \frac{|A \cap B|}{|A \cup B|}, \quad (11)$$

where $|x|$ denotes the voxel number of x . The value of JSC is between 0 and 1 and the larger JSC value means the better overlap of A and B.

The higher sensitivity S_e and higher specificity S_p means more accurate extraction of brain region. Sensitivity S_e is to measure the ratio of extracted brain region to total brain region:

$$S_e = \frac{TP}{TP + FN}. \quad (12)$$

If more brain voxels are obtained, the S_e value will be higher. Specificity S_p is to measure the ratio of rejected non-brain region to total non-brain region:

$$S_p = \frac{TN}{TN + FP}. \quad (13)$$

If more non-brain voxels are rejected the S_p value will be higher. The true positive rate, TP, is the number of voxels extracted as brain correctly. The number of voxels incorrectly extracted as brain is denoted by FP. The true negative rate, TN, is the number of voxels extracted as non-brain correctly. The number of voxels incorrectly extracted as non-brain region is denoted by FN.

Two probabilities of miss rate, p_m and p_f , were defined in [8]. The probability of missed detection of the brain voxels is defined as:

$$p_m = \frac{|A - B|}{|A \cup B|}. \quad (14)$$

The probability of miss rejection of the non-brain voxels is defined as:

$$p_f = \frac{|B - A|}{|A \cup B|}. \quad (15)$$

The lower these two miss rates means the better brain extraction.

BrainWeb provides discrete anatomical model to label tissues and the CSF region provided by BrainWeb contains ventricle areas as well as peripheral CSF areas, which are generally considered as non-brain regions. Therefore, we evaluate the brain extraction algorithms with this data set according to two criteria. One only considers WM and GM, the other considers WM, GM, and CSF as the total brain region.

C. Experimental results

Tables I, II, III, IV, V, and VI list the performance evaluation results of BET, BSE, HWA, ISTRIP and the proposed method for different data sets. In addition to the Table I, in other cases, although HWA has the highest S_e , its poor performance of S_p results in its worse performance of JSC.

Since some of the brain volumes in the first IBSR data set has apparent intensity inhomogeneity and artifacts, therefore, not all brain volumes have the satisfied result. As [10], Table I excludes the extracted brains which the JSC value is below 0.6

or the result is blank. The number of excluded brains are four, three, and five for the BSE, HWA, and the proposed method, respectively. Performance evaluation using the first IBSR data set without including all the failure cases as shown in Table II, and the number of excluded cases is seven. In Table I and Table II we have the similar JSC value with ISTRIP. In terms of S_e and S_p , the proposed method has better sensitivity than ISTRIP. However, ISTRIP can extract the all brain volumes in the first IBSR data set.

The proposed method outperforms others for the second IBSR set, in terms of JSC, S_e , and S_p . As listed in Table III, compared to HWA, our method maintains the high sensitivity of HWA as much as possible and improves the low specificity of HWA to the highest one. Our method achieves the highest JSC, the second highest S_e , and the highest S_p . In this data set, the total amount of voxels in an MR volume is 8388168, and the brain region is about one-eighth of the total voxels. Therefore, 0.01 voxels S_e of the value means there are about 10000 of the extracted brains overlapped with the ground truth. The 0.01 voxels S_p of the value means there are about 70000 of the extracted non-brain regions overlapped with the non-brain regions of the ground truth. The 0.01 voxels JSC of the value means there are more than 10000 of the extracted brains overlapped with the ground truth.

When using the VGHTPE data set, although BSE has the highest S_p and JSC values, it has the lowest S_e . This means BSE may exclude many brain voxels. Comparison of BET, ISTRIP, and the proposed method, BET has the highest S_p and the lowest S_e . On the contrary, ISTRIP has the highest S_e and the lowest S_p . The proposed method has the intermediate values of S_p and S_e . The results of performance evaluation for VGHTPE data set are listed in Table IV.

The performance evaluation using the BrainWeb phantom data set and only considering WM and GM is listed in Table V. Although BSE has the highest S_p , but has the lowest S_e . The proposed method has the best performance compared with BET and ISTRIP, in terms of JSC, S_e , and S_p .

Since the ground truth of the CSF region provided by BrainWeb contains peripheral CSF area, the values of S_p when considering CSF, as listed in Table VI, higher than those in Table V. In Table VI, the higher S_e means that the segmentation result may contain more peripheral CSF voxels. Therefore, we only concern the S_p value with this data set, and we have the similar S_p of BET which has the highest value.

The parameters of the second IBSR data set are as same as those used in [10]. For each brain extraction method, except BSE, the parameters of the VGHTPE and BrainWeb phantom data sets are the same. The fractional intensity threshold of BET was set as 0.7; the parameters of HWA were set to the default values with surface-shrink option turned on; the intensity contrast of ISTRIP was set as 0.08 with "further remove non-brain tissues with high intensity" option turned on; the weight of intra n-link was set as 0.35, t-link was set as 0.65 and the distance term was set as 0.07 in the proposed method. The edge constant, diffusion iteration, and diffusion constant,

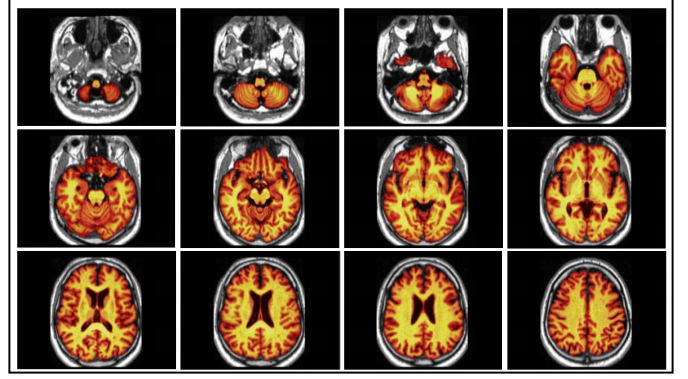


Fig. 14. The extracted brain image using the proposed method with the subject in the second IBSR data set.

erosion size of BSE when using the VGHTPE (BrainWeb phantom) data set were set to be 25 (increased with the degree of non-uniformity), 3, 0.62 and 1 (2), respectively.

The extracted brain image using the proposed method with the subject in the second IBSR data set is shown in Figure 14. In our method we bring up three points, distance term at the highest level, pre-determined foreground and application of graph cuts algorithm localized by using smaller cubes to local estimation of intensity histogram. The left column of Figure 15 illustrates the extracted brains without using the distance term, and the right column is the extracted brain using distance term. The difference is obvious, the border of the extracted brains in the right column are more smooth. Figure 16 shows the extracted brain of the proposed method overlaid by another without considering pre-determined foreground. The brain region of proposed method is larger than the one without using pre-determined foreground. Some brain extraction methods segment brain volume in a slice-by-slice manner, however we use smaller cubes to do this work. The left column of Figure 17 shows the extracted brain of the proposed method overlaid with a brain extracted by graph cuts algorithm in a slice-by-slice manner, and the right column shows the extracted brain of proposed method. The brain region of proposed method is larger than the one using the slice-by-slice manner. Since the upper part of the image in the right column of Figure 17 is darker than the bottom part of image in transverse view, therefore, applying graph cuts algorithm localized by using the local estimated histogram is preferable than slice-by-slice manner.

The performance evaluations of the proposed method without distance term/predetermined term and in a slice-by-slice manner using the second IBSR data set are listed in Table VII. Although the proposed method without predetermined term has the highest JSC value and specificity, but it has lower sensitivity than the proposed method with the three factors. According to the value of JSC, S_e , and S_p , distance term, pre-determined foreground and application of graph cuts algorithm localized by using smaller cubes to local estimated intensity histogram are important factors in our method.

TABLE I
PERFORMANCE EVALUATION USING THE FIRST IBSR DATA SET AND EXCLUDING THE FAILURE RESULTS OF EACH BRAIN EXTRACTION METHOD.

Method	JSC	S_e	S_p	P_m	P_f
BET	0.878 (0.017)	0.983 (0.023)	0.987 (0.004)	0.016 (0.022)	0.107 (0.021)
BSE ⁴	0.900 (0.025)	0.954 (0.035)	0.993 (0.003)	0.044 (0.034)	0.055 (0.017)
ISTRIP	0.910 (0.018)	0.986 (0.013)	0.991 (0.005)	0.013 (0.013)	0.077 (0.027)
HWA ³	0.752 (0.037)	0.974 (0.068)	0.970 (0.008)	0.022 (0.056)	0.226 (0.026)
Our method ⁵	0.910 (0.021)	0.989 (0.012)	0.991 (0.003)	0.010 (0.011)	0.079 (0.020)

The superscripts in the first column indicate the excluded cases.

TABLE II
PERFORMANCE EVALUATION USING THE FIRST IBSR DATA SET WITHOUT INCLUDING ALL THE FAILURE CASES.

Method	JSC	S_e	S_p	P_m	P_f
BET ⁷	0.881 (0.017)	0.981 (0.026)	0.988 (0.003)	0.017 (0.024)	0.102 (0.021)
BSE ⁷	0.905 (0.025)	0.954 (0.035)	0.994 (0.002)	0.044 (0.034)	0.051 (0.010)
ISTRIP ⁷	0.911 (0.014)	0.988 (0.015)	0.991 (0.004)	0.012 (0.014)	0.077 (0.023)
HWA ⁷	0.762 (0.012)	0.999 (0.001)	0.967 (0.008)	0.001 (0.001)	0.237 (0.014)
Our method ⁷	0.910 (0.021)	0.991 (0.008)	0.991 (0.003)	0.009 (0.007)	0.081 (0.020)

The superscripts in the first column indicate the excluded cases.

TABLE III
PERFORMANCE EVALUATION USING THE SECOND IBSR DATA SET.

Method	JSC	S_e	S_p	P_m	P_f
BET	0.891 (0.052)	0.959 (0.042)	0.989 (0.005)	0.038 (0.038)	0.071 (0.031)
BSE	0.838 (0.083)	0.957 (0.042)	0.973 (0.030)	0.041 (0.041)	0.119 (0.104)
ISTRIP	0.915 (0.018)	0.978 (0.011)	0.990 (0.003)	0.021 (0.011)	0.064 (0.022)
HWA	0.814 (0.040)	0.9997 (0.0003)	0.965 (0.016)	0.0002 (0.0002)	0.186 (0.040)
Our method	0.930 (0.011)	0.981 (0.016)	0.991 (0.005)	0.018 (0.015)	0.052 (0.017)

TABLE IV
PERFORMANCE EVALUATION USING THE VGHTPE DATA SET.

Method	JSC	S_e	S_p	P_m	P_f
BET	0.921 (0.009)	0.971 (0.013)	0.994 (0.001)	0.028 (0.012)	0.051 (0.011)
BSE	0.933 (0.008)	0.958 (0.011)	0.997 (0.001)	0.041 (0.011)	0.026 (0.008)
ISTRIP	0.915 (0.011)	0.984 (0.012)	0.991 (0.002)	0.015 (0.011)	0.07 (0.015)
HWA	0.847 (0.019)	0.998 (0.002)	0.979 (0.003)	0.002 (0.002)	0.151 (0.019)
Our method	0.920 (0.010)	0.982 (0.009)	0.992 (0.002)	0.017 (0.009)	0.063 (0.017)

TABLE V
PERFORMANCE EVALUATION USING THE BRAINWEB PHANTOM DATA SET AND ONLY CONSIDERING ONLY WM AND GM.

Method	JSC	S_e	S_p	P_m	P_f
BET	0.832 (0.010)	0.994 (0.002)	0.945 (0.005)	0.005 (0.001)	0.163 (0.011)
BSE	0.855 (0.041)	0.989 (0.005)	0.954 (0.018)	0.010 (0.004)	0.136 (0.044)
ISTRIP	0.811 (0.005)	0.998 (0.0003)	0.934 (0.002)	0.001 (0.0003)	0.188 (0.005)
HWA	0.696 (0.005)	0.9995 (0.0001)	0.876 (0.003)	0.0003 (9.00947E-05)	0.304 (0.005)
Our method	0.840 (0.025)	0.997 (0.001)	0.946 (0.011)	0.003 (0.001)	0.157 (0.026)

IV. DISCUSSION

The program execution speed of the existing methods for brain extraction which compared in this work are fast (less than a minute). The program execution speed of the proposed method is about 5 minutes for an MR volume. Regarding to the performance evaluation for brain extraction, our method outperforms others for the second IBSR data set. Therefore,

the time cost of the proposed method is not expensive. The compared method in this work, BET, HWA, and ISTRIP are performed on Genuine Intel CPU 2.93GHz×16 processor running Linux, BSE and our method are performed on Intel Core2 Quad XP 2.83GHz processor on Windows system. Most of the running time of our method spent on the Otsu's method, since it was performed frequently. Although the speed of

TABLE VI
PERFORMANCE EVALUATION USING THE BRAINWEB PHANTOM DATA SET AND CONSIDERING WM, GM AND CSF.

Method	JSC	S_e	S_p	P_m	P_f
BET	0.928 (0.009)	0.944 (0.011)	0.993 (0.001)	0.055 (0.011)	0.017 (0.003)
BSE	0.870 (0.031)	0.897 (0.009)	0.988 (0.018)	0.0999 (0.012)	0.030 (0.041)
ISTRIP	0.934 (0.001)	0.963 (0.004)	0.988 (0.001)	0.036 (0.004)	0.031 (0.003)
HWA	0.850 (0.003)	0.993 (0.002)	0.936 (0.002)	0.006 (0.002)	0.144 (0.004)
Our method	0.912 (0.007)	0.934 (0.017)	0.991 (0.005)	0.064 (0.0178)	0.024 (0.013)

TABLE VII
PERFORMANCE EVALUATION OF THE PROPOSED METHOD WITHOUT DISTANCE TERM/PREDETERMINED TERM AND IN A SLICE-BY-SLICE MANNER USING THE SECOND IBSR DATA SET.

Method	JSC	S_e	S_p	P_m	P_f
Our method	0.930 (0.011)	0.981 (0.016)	0.991 (0.005)	0.018 (0.015)	0.052 (0.017)
Our method without distance term	0.911 (0.023)	0.975 (0.017)	0.989 (0.007)	0.024 (0.016)	0.066 (0.026)
Our method in slice-by-slice manner	0.904 (0.020)	0.953 (0.024)	0.991(0.006)	0.045 (0.023)	0.051 (0.022)
Our method without predetermined term	0.933 (0.012)	0.979 (0.016)	0.992 (0.004)	0.020 (0.016)	0.047 (0.016)

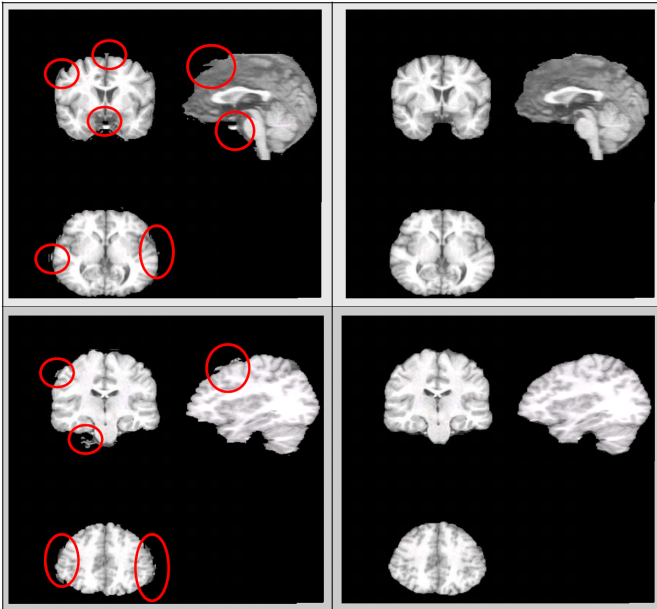


Fig. 15. The result of extracted brain without using distance term at the highest level. The left column is the extracted brain without considering the contour factor. The right column is the extracted brain and consider the contour factor corresponding to the left column.

multiresolutional graph cuts with narrow band should be faster, but we use multiresolutional graph cuts to extracted brain instead of using multiresolutional graph cuts with narrow band. The reason is that the multiresolutional graph cuts with narrow band will limit the refinement of the results in a band and may miss the thin structure.

In our method we perform graph cuts algorithm individually for each cube, the advantage is to consider the influence of the intensity inhomogeneity. In the finest level, when the cube contains only a small portion of brain region. The intensity of foreground seeds may be similar to the non-brain region.

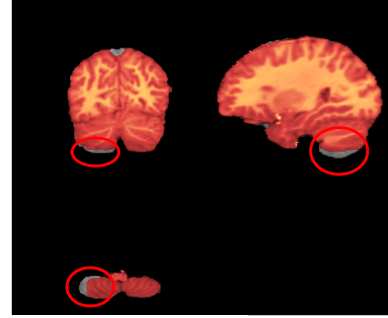


Fig. 16. The extracted brain of proposed method overlaid by another without considering pre-determined foreground factor.

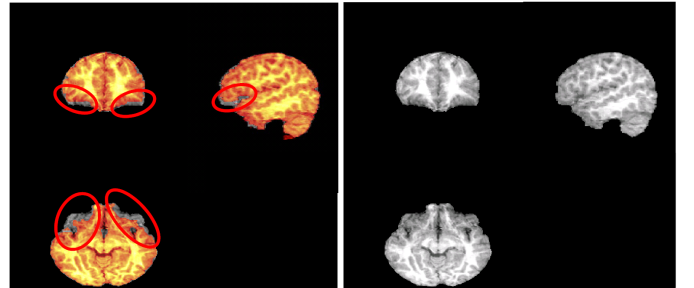


Fig. 17. The left column shows the extracted brain of proposed method overlaid with a brain extracted by graph cuts algorithm in a slice-by-slice manner, and the right column shows the extracted brain of proposed method.

Therefore the results may contain non-brain and have irregular border, as shown in the red window of Figure. 18. The distance term can correct this problem, but if the distance term is too big then the result may not be smooth.

The advantage of the distance term at the finest level is its capability to constrain the shape of brain boundary. However, it has disadvantages. In some cases the extracted brain at middle levels are better than that at the highest level. Since the contour

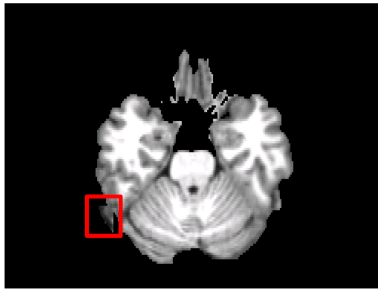


Fig. 18. An example of the possible disadvantage by using localized graph cuts.

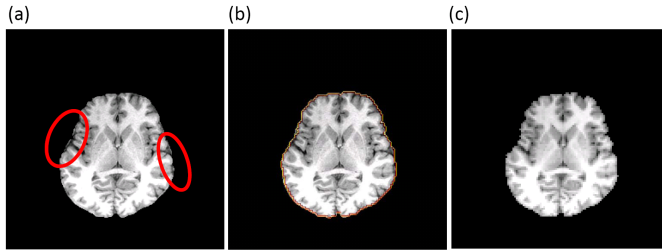


Fig. 19. An example of the possible disadvantage by using the distance term in the finest level. (a) The extracted brain at the highest level and the red windows show the non-brain voxels. (b) The yellow line shows the contour used in distance term at the highest level, and the positions corresponding to the red windows in (a) are inconsistent with the brain area. (c) The extracted brain at middle levels. (a) and (b) are shrunk as the size of (c).

used in distance term is upsampled from the coarser level, the contour may not be entirely consistent with the border of the brain at the highest level, as illustrated in Figure 19.

V. CONCLUSION

We have proposed an automatic method based on multiresolutional graph cuts technique to segment the head MR images into brain and non-brain regions.

The contributions of this work are 1) using distance term at the highest level to constrain the brain contour, 2) using pre-determined foreground from the coarser level to avoid excluding the brain voxels, 3) and applying graph cuts algorithm individually for smaller cubes to tackle the intensity inhomogeneity problem.

We have compared to the existing methods and compared with our method by using four data sets. Regarding the performance evaluation for brain extraction, our method outperforms others for the first/second IBSR data set and BrainWeb phantom data set, and comparably with the BET and ISTRIP methods for the VGHTPE data sets.

REFERENCES

- [1] John Ashburner and Karl J. Friston. Voxel-Based Morphometry-The Methods. *NeuroImage*, 11:805-821, 2000.
- [2] Catriona D. Good, Ingrid S. Johnsrude, John Ashburner, John Ashburner, Karl J. Friston, and Richard S. J. Frackowiak. A voxel based morphometric study of ageing in 465 normal adult human brains. *NeuroImage*, 14:21-36, 2001.
- [3] M. Kubicki, M. E. Shenton, D. F. Salisbury, Y. Hirayasu, K. Kasai, R. Kikinis, F. A. Jolesz, and R. W. McCarley. Voxel-Based Morphometric Analysis of Gray Matter in First Episode Schizophrenia. *NeuroImage*, 17:1711-1719, 2002.

- [4] Andrew M. McIntosh, Dominic E. Job, T. William J. Moorhead, Lesley K. Harrison, Karen Forrester, Stephen M. Lawrie, and Eve C. Johnstone. Voxel-based morphometry of patients with schizophrenia or bipolar disorder and their unaffected relatives. *Biological Psychiatry*, 56:544-552, 2004.
- [5] Paul M. Thompson, Agatha D. Lee, Rebecca A. Dutton, Jennifer A. Geaga, Kiralee M. Hayashi, Mark A. Eckert, Ursula Bellugi, Albert M. Galaburda, Julie R. Korenberg, Debra L. Mills, Arthur W. Toga, and Allan L. Reiss. Abnormal Cortical Complexity and Thickness Profiles Mapped in Williams Syndrome. *Neuroscience*, 25(16):4146-4158, 2005.
- [6] Stephen M. Smith. Fast Robust Automated Brain Extraction. *Human Brain Mapping*, 17:143-155, 2002.
- [7] Horst K. Hahn and Heinz-Otto Peitgen. The Skull Stripping Problem in MRI Solved by a Single 3D Watershed Transform. *MICCAI*, 134-143, 2000.
- [8] David W. Shattuck, Stephanie R. Sandor-Leahy, Kirt A. Schaper, David A. Rottenberg, and Richard M. Leahy. Magnetic Resonance Image Tissue Classification Using a Partial Volume Model. *NeuroImage*, 13:856-876, 2001.
- [9] F. Ségonne, E. Busa, M. Glessner, D. Salat, A.M. Dale, H.K. Hahn, and B. Fischl. A hybrid approach to the skull stripping problem in MRI. *NeuroImage*, 22:1060-1075, 2004.
- [10] Jia-Xiu Liu, Yong-Sheng Chen, Li-Fen Chen. Accurate and robust extraction of brain regions using a deformable model based on radial basis functions. *Journal of Neuroscience Methods*, 183:155-166, 2009.
- [11] Thomas H. Cormen, Charles E. Leiserson, Ronald L. Rivest, and Clifford Stein. Introduction To Algorithms, Second Edition. 2001.
- [12] Yuri Y. Boykov and Marie-Pierre Jolly. Interactive Graph Cuts for Optimal Boundary & Region Segmentation of Objects in N-D Images. *International Conference on Computer Vision*, vol. I, p.105, 2001.
- [13] Brian L. Price, Bryan Morse, Scott Cohen. Geodesic Graph Cut for Interactive Image Segmentation. *Conference on Computer Vision and Pattern Recognition*, 2010.
- [14] Yin Li, Jian Sun, Chi-Keung Tang, Heung-Yeung Shum. Lazy Snapping. *ACM*, 2004.
- [15] Carsten Rother, Vladimir Kolmogorov and Andrew Blake. "GrabCut"-Interactive Foreground Extraction using Iterated Graph Cuts. *ACM Transactions on Graphics*, 23:309-314, 2004.
- [16] Jean Stawiaski, Etienne Decencière and François Bidault. Interactive Liver Tumor Segmentation Using. *MICCAI*, 2008.
- [17] Yin Li, Jian Sun, Heung-Yeung Shum. Video Object Cut and Paste. *ACM Transactions on Graphics*, 24:595-600, 2005.
- [18] J. Reese and W. Barrett. Image Editing with Intelligent Paint. *EUROGRAPHICS*, 2002.
- [19] Xue Bai, Jue Wang, David Simons, Guillermo Sapiro. Video SnapCut: Robust Video Object Cutout Using Localized Classifiers. *ACM SIGGRAPH*, 2009.
- [20] Herve Lombaert, Yiyong Sun, Leo Grady, Chenyang Xu. A Multilevel Banded Graph Cuts Method for Fast Image Segmentation. *ICCV*, 259-265, 2005.
- [21] Ali Kemal Sinop and Leo Grady. Accurate Banded Graph Cut Segmentation of Thin Structures Using Laplacian Pyramids. 896-903 *MICCAI*, 2006.
- [22] Suresh A. Sadananthan, Weili Zheng, Michael W.L. Chee, Vitali Zagorodnov. Skull stripping using graph cuts. *NeuroImage*, 49:225-239, 2010.
- [23] Yuri Boykov and Vladimir Kolmogorov. An Experimental Comparison of Min-Cut/Max-Flow Algorithms for Energy Minimization in Vision. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2004.
- [24] David M. Mount and Sunil Arya. ANN: A Library for Approximate Nearest Neighbor Searching, Internet: www.icceengg.edu/staff.html, Jan 27, 2010 [Sep. 17, 2010].
- [25] Ostu N. Threshold selection method from gray-level histograms. *IEEE Trans Syst Man Cybern*, 9:62-66, 1979.


國科會補助專題研究計畫項下出席國際學術會議心得報告

日期：2010 年 6 月 14 日

計畫編號	NSC 98-2221-E-009-147-		
計畫名稱	腦部結構磁共振造影影像量化分析與模板建立		
出國人員 姓名	陳永昇	服務機構 及職稱	交通大學 資訊工程系 助理教授
會議時間	2010 年 6 月 6 日至 2010 年 6 月 10 日	會議地點	西班牙 巴塞隆納
會議名稱	(中文)人腦造影年度會議 (英文)Annual Meeting of the Organization for Human Brain Mapping		
發表論文 題目	(中文)早期視覺處理中不同人臉表情之迦瑪活動模式：腦磁圖研究 (英文) Gamma oscillation patterns for different facial expressions in early visual processing: an MEG study		

一、參加會議經過

Human Brain Mapping 是由人腦造影國際組織所籌辦的年度會議，為腦科學研究領域最重要的會議之一，每年均吸引兩千餘人參與。今年會議在西班牙巴塞隆納舉行，我們在會議前一天抵達，克服時差後旋即全程參與會議，並發表了研究論文：“Gamma oscillation patterns for different facial expressions in early visual processing: an MEG study”。這篇論文的重點在我們利用腦磁圖來研究當受試者接受不同人臉表情（包括正向與負向情緒）影像刺激時，其早期視覺處理相關的腦部迦瑪活動模式的不同。

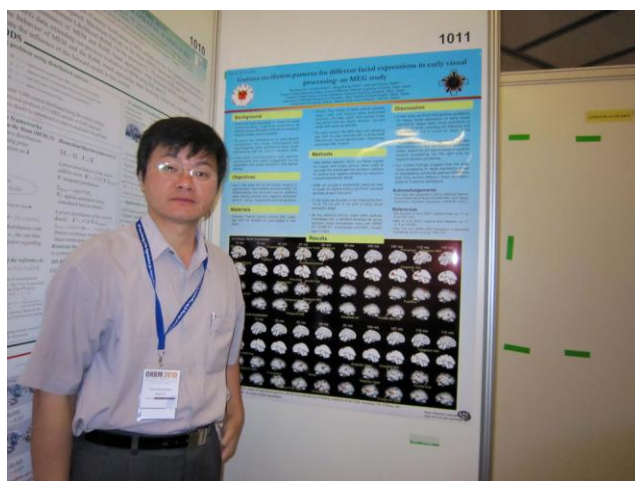

圖：壁報論文發表

二、與會心得

第一天的議程包括最重要的 Talairach Lecture。今年大會邀請的是 Rutgers University 的 Gyorgy Buzsaki 教授，演講有關腦活動振盪與認知之間的關聯。他提到在海馬迴與前額葉皮質區的大範圍神經活動整體量測會不斷地改變組合序列，且不同的起始條件會產生不同的序列。此外，深層睡眠（deep sleep）、淺層睡眠（light sleep）、與快速動眼睡眠（REM sleep）在 arousal（wakefulness）與 conscious level（awareness）象限分佔不同區塊，如何腦造影技術與計算來評估也是很有趣的主題。在由 University of Liege 的 Quentin Noirhomme 教授所主持的 workshop “Measuring consciousness in disorders of connectivity”中，與會學者提出利用 bispectral index 來計算 conscious level，藉由 Granger Causality 來衡量腦部活動之複雜度與有效連結度（effective connectivity），或利用 Default Mode Network 來評估休息狀態腦部連結等，並有學者利用這些技術進行研究，並提出報告指出睡眠能增強左右半腦間的同步連結。另外，在 “Multi-subject surface-based analysis of fMRI data: challenges, solutions, and limitations” workshop 中，與會學者提到腦溝（sulci）具有很大的變異性，因此利用腦迴與腦溝的高度或深度所呈現的摺疊模式（folding patterns）來進行腦部結構對位，具有比較高的計算可信度。也有學者提出可將功能性磁振造影與結構性磁振造影進行對位的 boundary-based registration 方法，以及可由訓練資料中自動學習影像對位 cost function 的技術等等，非常豐富、深入、與多元，收穫良多。

三、建議

本會議每年均包含豐富的教育訓練課程，精彩的 Keynote Speech，以及涵蓋記憶、學習、心理、精神、語言、情緒、認知、視覺、運動、腦結構、模型等等主題，非常值得國內相關領域研究人員參與此會議。

四、攜回資料名稱及內容

攜回會議議程與論文列表，而論文檔案須經由大會網站下載。

無研發成果推廣資料

98 年度專題研究計畫研究成果彙整表

計畫主持人：陳永昇			計畫編號：98-2221-E-009-147-				
計畫名稱：腦部結構磁共振造影影像量化分析與模板建立							
成果項目			量化			單位	備註（質化說明：如數個計畫共同成果、成果列為該期刊之封面故事...等）
			實際已達成數（被接受或已發表）	預期總達成數(含實際已達成數)	本計畫實際貢獻百分比		
國內	論文著作	期刊論文	0	1	100%	篇	
		研究報告/技術報告	0	0	100%		
		研討會論文	0	0	100%		
		專書	1	1	100%		碩士論文
	專利	申請中件數	0	0	100%	件	
		已獲得件數	0	0	100%		
	技術移轉	件數	0	0	100%	件	
		權利金	0	0	100%	千元	
	參與計畫人力（本國籍）	碩士生	4	1	100%	人次	
		博士生	1	1	100%		
		博士後研究員	0	0	100%		
		專任助理	2	0	100%		
國外	論文著作	期刊論文	0	0	100%	篇	
		研究報告/技術報告	0	0	100%		
		研討會論文	0	0	100%		
		專書	0	0	100%	章/本	
	專利	申請中件數	0	0	100%	件	
		已獲得件數	0	0	100%		
	技術移轉	件數	0	0	100%	件	
		權利金	0	0	100%	千元	
	參與計畫人力（外國籍）	碩士生	0	0	100%	人次	
		博士生	0	0	100%		
		博士後研究員	0	0	100%		
		專任助理	0	0	100%		

<p>其他成果</p> <p>(無法以量化表達之成果如辦理學術活動、獲得獎項、重要國際合作、研究成果國際影響力及其他協助產業技術發展之具體效益事項等，請以文字敘述填列。)</p>	<p>兼任助理計畫碩士生王億婷參與交通大學資訊學院生醫工程研究所生醫論壇，發表本計畫研究成果，榮獲優勝（第二名）。</p>
---	---

	成果項目	量化	名稱或內容性質簡述
<div> 科 教 處 計 畫 加 填 項 目 </div>	測驗工具(含質性與量性)	0	
	課程/模組	0	
	電腦及網路系統或工具	0	
	教材	0	
	舉辦之活動/競賽	0	
	研討會/工作坊	0	
	電子報、網站	0	
	計畫成果推廣之參與（閱聽）人數	0	

國科會補助專題研究計畫成果報告自評表

請就研究內容與原計畫相符程度、達成預期目標情況、研究成果之學術或應用價值（簡要敘述成果所代表之意義、價值、影響或進一步發展之可能性）、是否適合在學術期刊發表或申請專利、主要發現或其他有關價值等，作一綜合評估。

1. 請就研究內容與原計畫相符程度、達成預期目標情況作一綜合評估

☒ 達成目標

☐ 未達成目標（請說明，以 100 字為限）

☐ 實驗失敗

☐ 因故實驗中斷

☐ 其他原因

說明：

2. 研究成果在學術期刊發表或申請專利等情形：

論文：☐ 已發表 ☐ 未發表之文稿 ☒ 撰寫中 ☐ 無

專利：☐ 已獲得 ☐ 申請中 ☒ 無

技轉：☐ 已技轉 ☐ 洽談中 ☒ 無

其他：（以 100 字為限）

3. 請依學術成就、技術創新、社會影響等方面，評估研究成果之學術或應用價值（簡要敘述成果所代表之意義、價值、影響或進一步發展之可能性）（以 500 字為限）

在這一年度的計畫中，我們發展了一個多解析度圖形分割架構，以針對磁振造影頭部影像進行純腦和非腦區域的分割，並達到高敏感度和高精確度的純腦區域擷取目標。我們使用了四組資料來比較我們所提出的方法和四個文獻上被廣泛使用的純腦區域擷取方法，包括：Brain Surface Extractor、Brain Extraction Tool、Hybrid Watershed algorithm 和 ISTRIP。在對純腦區域擷取的表現評估方面，使用 IBSR 的第一和第二組資料以及 BrainWeb 的腦部模擬影像時，我們的方法比其他的方法有較為準確的純腦區域擷取結果。這個方法具創新性，實驗結果良好，對腦部結構分析流程很有幫助，深具期刊論文發表價值。